DC 35x35x10mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

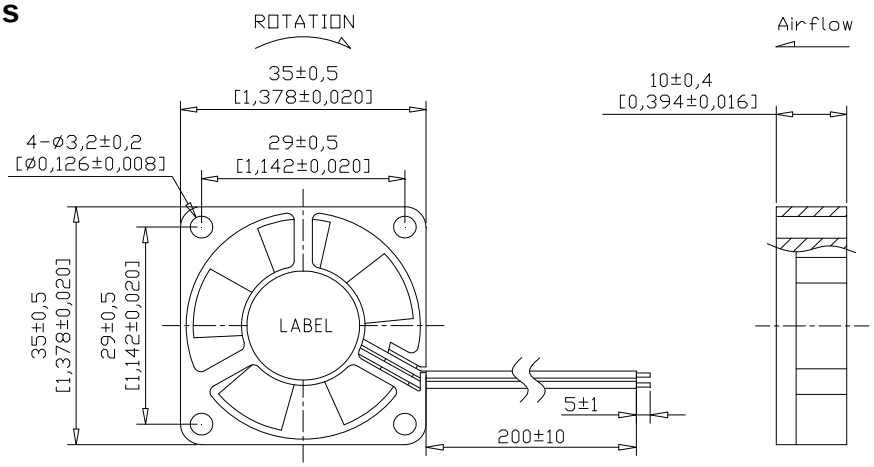

Air Flow - Static Pressure Characteristics

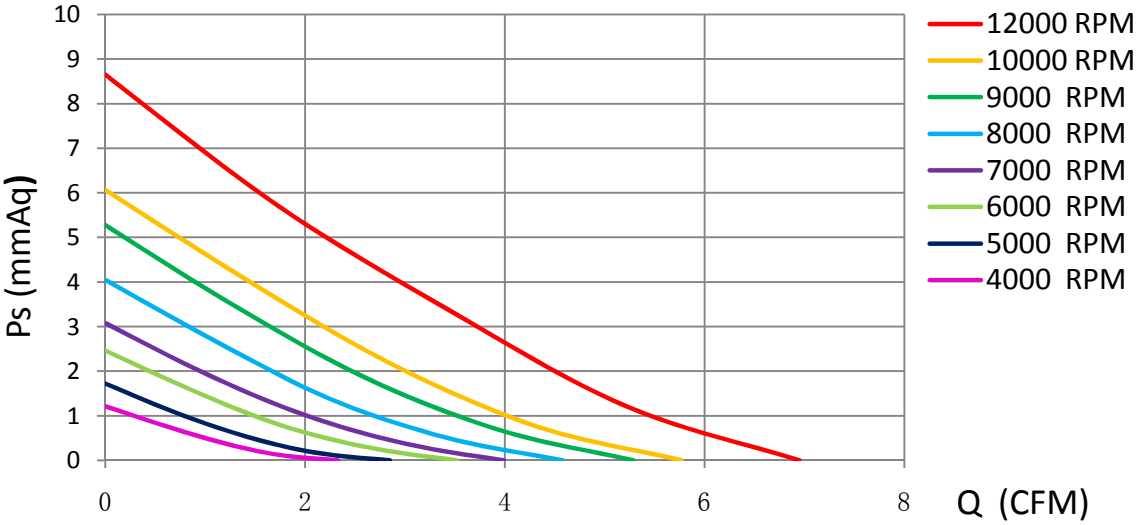

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD3510E05X	5	4~5.5	0.07	0.35	4000	2.33	0.065	1.21	0.048	16.1
CD3510L05X		4~5.5	0.10	0.50	5000	2.85	0.080	1.72	0.069	18.0
CD3510M05X		4~5.5	0.16	0.80	7000	3.99	0.112	3.08	0.122	21.8
CD3510H05X		4~5.5	0.24	1.20	9000	5.29	0.148	5.28	0.210	32.0
CD3510E12X	12	7~13.8	0.05	0.60	6000	3.52	0.099	2.46	0.098	21.8
CD3510L12X		7~13.8	0.07	0.84	8000	4.58	0.128	4.05	0.161	28.8
CD3510M12X		7~13.8	0.09	1.08	10000	5.77	0.162	6.07	0.241	35.1
CD3510H12X		7~13.8	0.11	1.32	12000	6.95	0.195	8.65	0.344	40.3

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD