DC 70x70x20mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

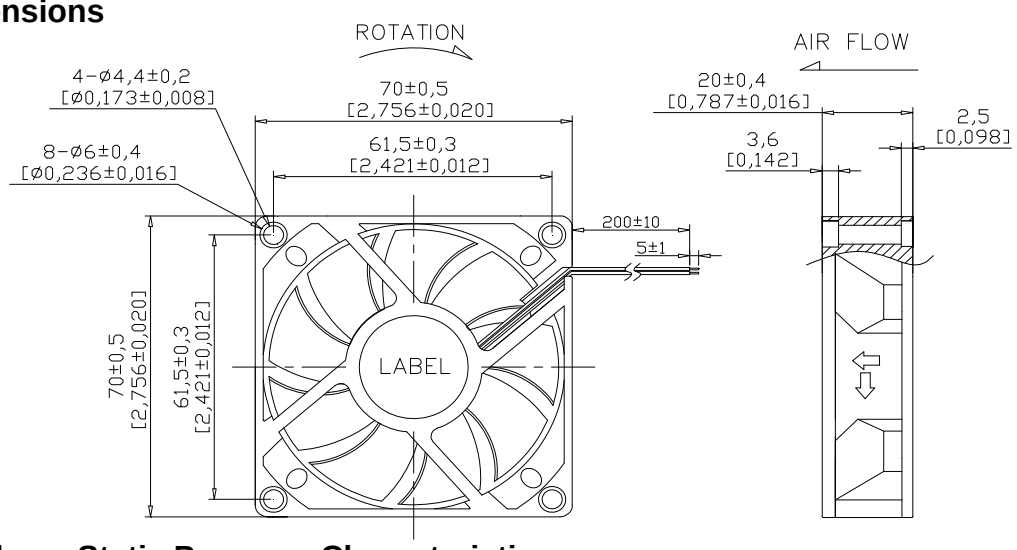

Air Flow - Static Pressure Characteristics

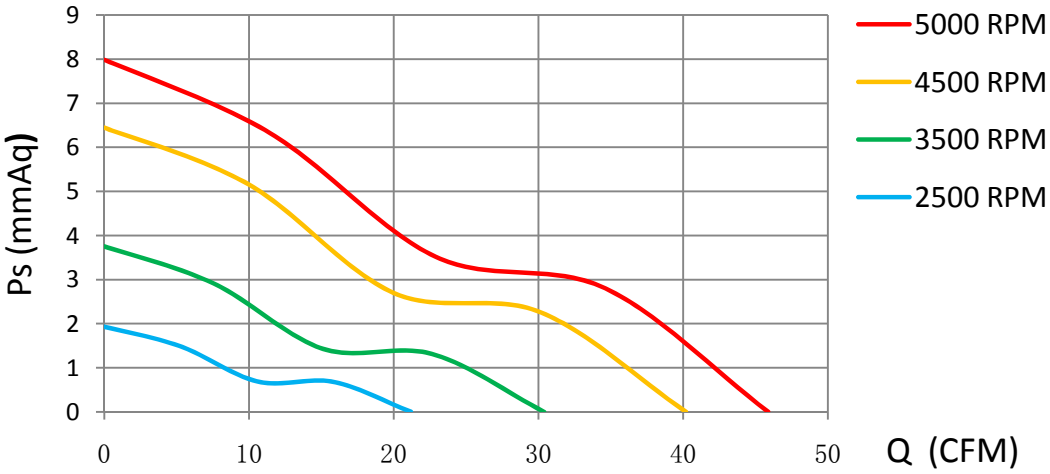

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD7020L05X	5	4~5.6	0.21	1.05	2500	21.20	0.594	1.93	0.076	22.7
CD7020M05X		4~5.6	0.29	1.45	3500	30.39	0.851	3.75	0.148	31.8
CD7020H05X		4~5.6	0.36	1.80	4500	40.19	1.125	6.45	0.254	39.7
CD7020E12X	12	7~13.8	0.14	1.68	2500	21.20	0.594	1.93	0.076	22.7
CD7020L12X		7~13.8	0.26	3.12	3500	30.39	0.851	3.75	0.148	31.8
CD7020M12X		7~13.8	0.39	4.68	4500	40.19	1.125	6.45	0.254	39.7
CD7020H12X		7~13.8	0.46	5.52	5000	45.88	1.285	7.99	0.315	42.9
CD7020L24X	24	12~25.6	0.08	1.92	2500	21.20	0.594	1.93	0.076	22.7
CD7020M24X		12~25.6	0.12	2.88	3500	30.39	0.851	3.75	0.148	31.8
CD7020H24X		12~25.6	0.19	4.56	4500	40.19	1.125	6.45	0.254	39.7
CD7020X24X		12~25.6	0.24	5.76	5000	45.88	1.285	7.99	0.315	42.9

Specifications are subject to change without notice