DC 92x92x38mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

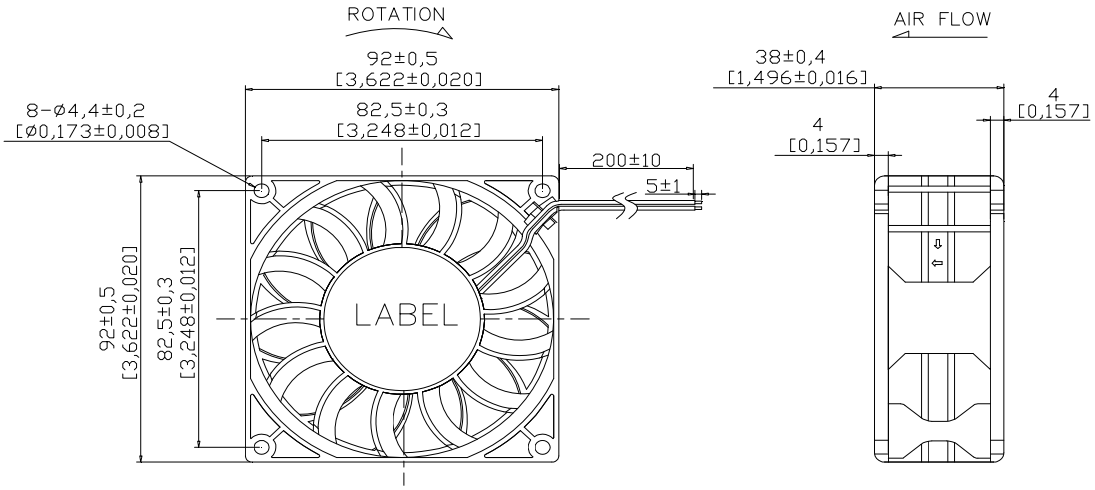

Air Flow - Static Pressure Characteristics

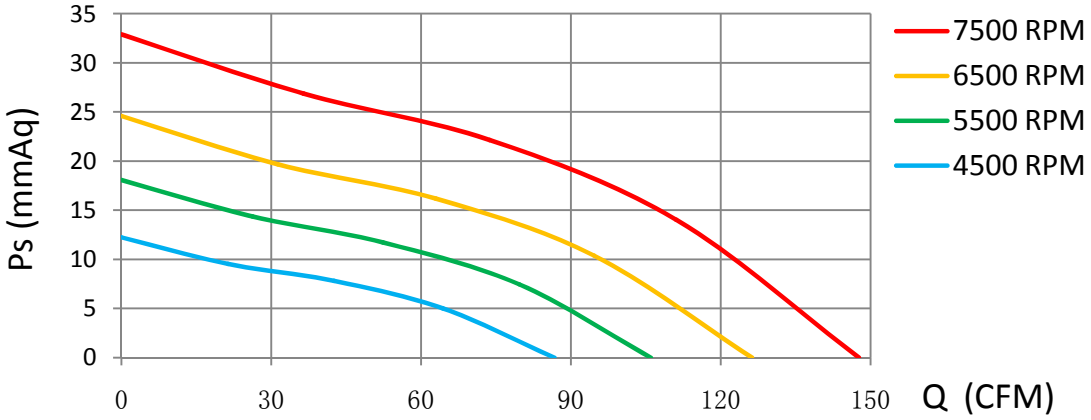

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9238L12X	12	7~13.8	1.50	18.00	4500	86.72	2.428	12.24	0.482	51.1
CD9238M12X		7~13.8	2.10	25.20	5500	106.01	2.968	18.08	0.712	56.9
CD9238H12X		7~13.8	2.80	33.60	6500	126.30	3.536	24.59	0.968	60.6
CD9238U12X		7~13.8	3.20	38.40	7500	147.67	4.135	32.90	1.295	64.6
CD9238E24X	24	12~25.6	0.40	9.60	4500	86.72	2.428	12.24	0.482	51.1
CD9238L24X		12~25.6	0.80	19.20	5500	106.01	2.968	18.08	0.712	56.9
CD9238M24X		12~25.6	1.20	28.80	6500	126.30	3.536	24.59	0.968	60.6
CD9238H24X		12~25.6	1.60	38.40	7500	147.67	4.135	32.90	1.295	64.6
CD9238L48X	48	36~54	0.3	14.4	5500	106.01	2.968	18.08	0.712	56.9
CD9238M48X		36~54	0.6	28.8	6500	126.30	3.536	24.59	0.968	60.6
CD9238H48X		36~54	0.9	43.2	7500	147.67	4.135	32.90	1.295	64.6

Specifications are subject to change without notice

NIKCOOL