DC 92x92x38mm - B

General Specifications

Material:……Frame:Plastic(UL94V0)
Impeller: ……Impeller:Plastic(UL94V0)
Expected Life: ……FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

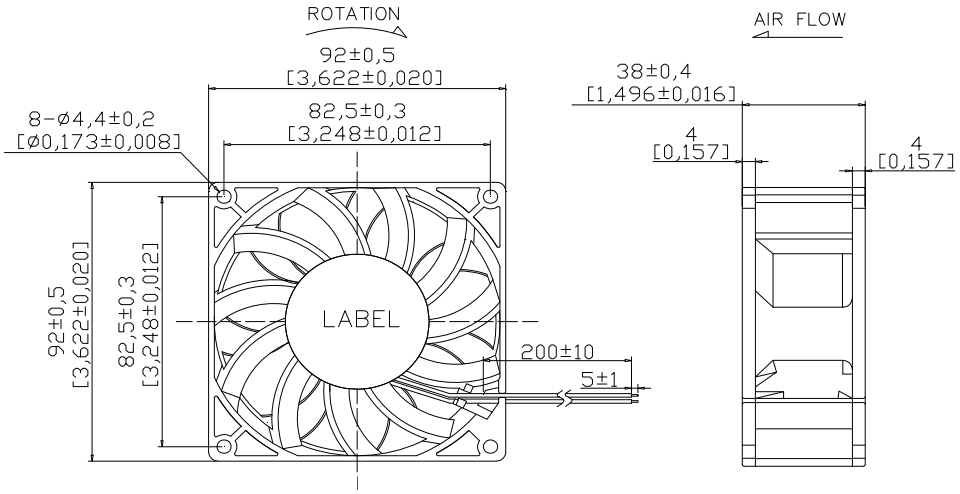

Air Flow - Static Pressure Characteristics

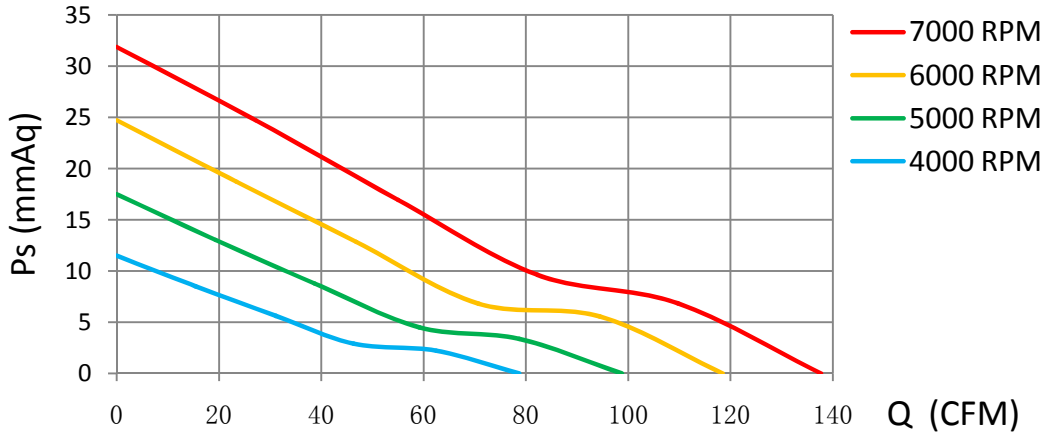

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9238E12X	12	7~13.8	0.80	9.60	4000	78.71	2.204	11.5	0.453	50.9
CD9238L12X		7~13.8	1.50	18.00	5000	98.77	2.766	17.49	0.689	56.5
CD9238M12X		7~13.8	2.10	25.20	6000	118.50	3.318	24.73	0.974	63.2
CD9238H12X		7~13.8	2.80	33.60	7000	137.68	3.855	31.89	1.256	66.2
CD9238E24X	24	12~25.6	0.40	9.60	4000	78.71	2.204	11.5	0.453	50.9
CD9238L24X		12~25.6	0.80	19.20	5000	98.77	2.766	17.49	0.689	56.5
CD9238M24X		12~25.6	1.20	28.80	6000	118.50	3.318	24.73	0.974	63.2
CD9238H24X		12~25.6	1.60	38.40	7000	137.68	3.855	31.89	1.256	66.2
CD9238L48X	48	36~54	0.30	14.4	5000	98.77	2.766	17.49	0.689	56.5
CD9238M48X		36~54	0.60	28.8	6000	118.50	3.318	24.73	0.974	63.2
CD9238H48X		36~54	0.90	43.2	7000	137.68	3.855	31.89	1.256	66.2

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD