DC 120x120x38mm - B

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

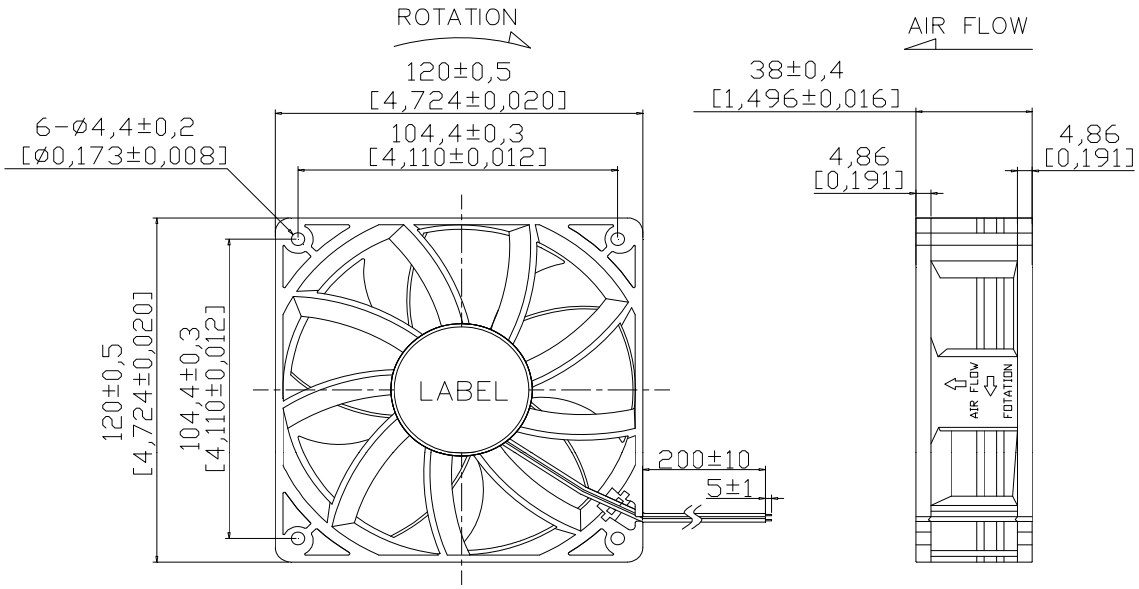

Air Flow - Static Pressure Characteristics

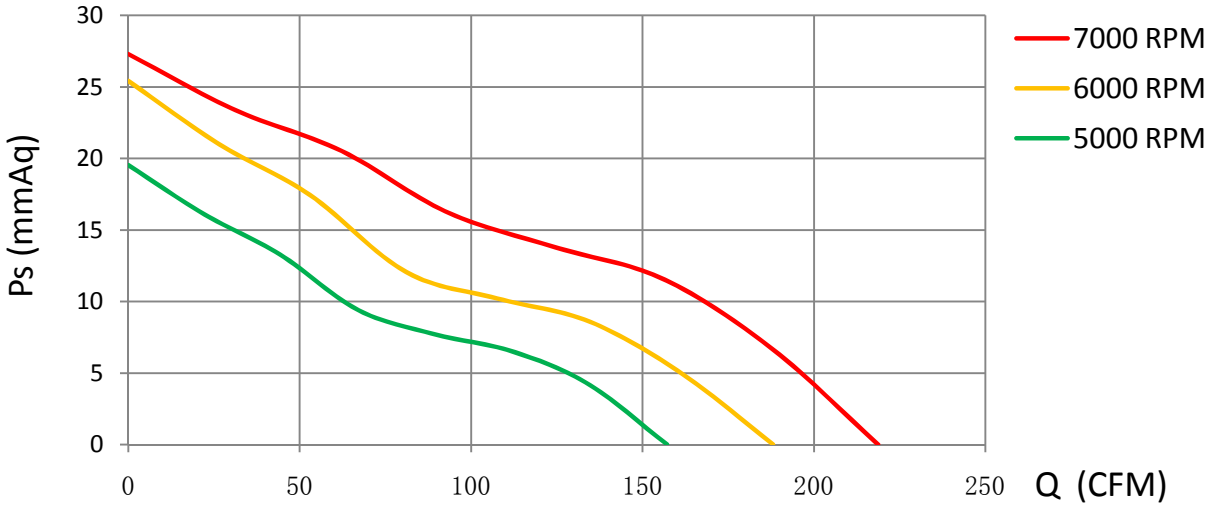

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD12038L12X	12	7~13.8	0.90	10.80	5000	157.23	4.402	19.53	0.769	61.5
CD12038M12X		7~13.8	1.80	21.60	6000	188.07	5.266	25.41	1.000	65.8
CD12038H12X		7~13.8	2.60	31.20	7000	218.77	6.126	27.29	1.074	69.3
CD12038L24X	24	12~25.6	0.40	9.60	5000	157.23	4.402	19.53	0.769	61.5
CD12038M24X		12~25.6	0.80	19.20	6000	188.07	5.266	25.41	1.000	65.8
CD12038H24X		12~25.6	1.30	31.20	7000	218.77	6.126	27.29	1.074	69.3

Specifications are subject to change without notice