DC 70x70x38mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....Ball Bearing 50,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

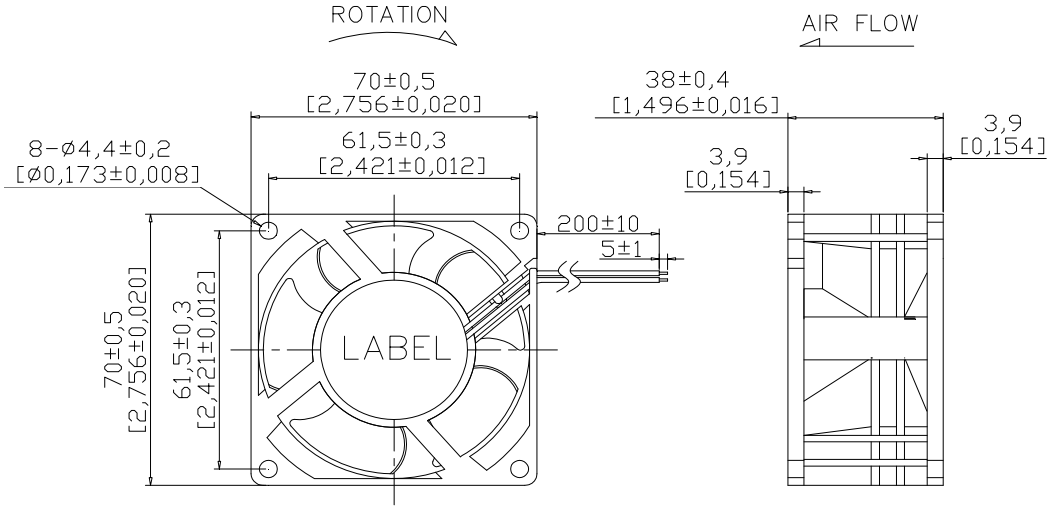

Air Flow - Static Pressure Characteristics

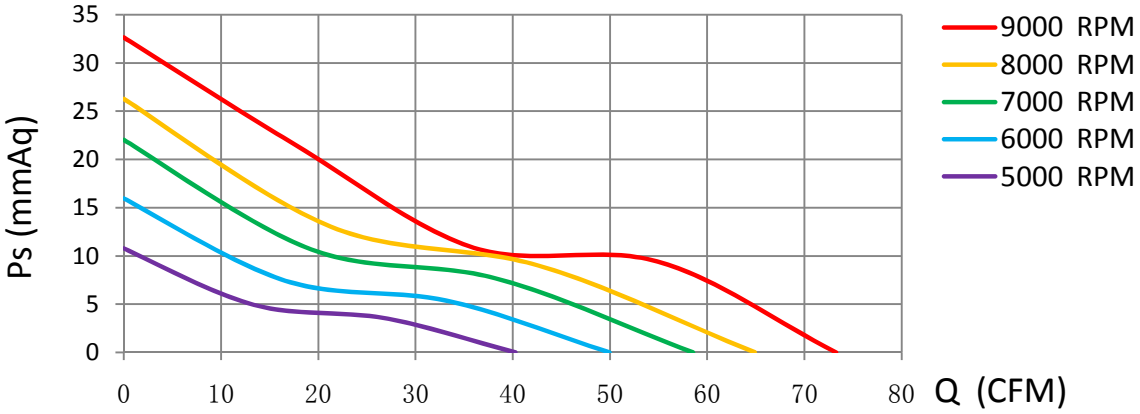

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD7038E12X	12	7~13.8	0.40	4.80	5000	40.25	1.127	10.78	0.424	41.1
CD7038L12X		7~13.8	0.60	7.20	6000	49.93	1.398	15.95	0.628	46.4
CD7038M12X		7~13.8	0.90	10.80	7000	58.53	1.639	22.02	0.867	50.6
CD7038H12X		7~13.8	1.20	14.40	8000	64.89	1.817	26.26	1.034	55.0
CD7038X12X		7~13.8	1.60	19.20	9000	73.25	2.051	32.62	1.284	57.5
CD7038L24X	24	12~25.6	0.40	9.60	6000	49.93	1.398	15.95	0.628	46.4
CD7038M24X		12~25.6	0.50	12.00	7000	58.53	1.639	22.02	0.867	50.6
CD7038H12X		12~25.6	0.60	14.40	8000	64.89	1.817	26.26	1.034	55.0
CD7038X24X		12~25.6	0.80	19.20	9000	73.25	2.051	32.62	1.284	57.5
CD7038L48X	48	36~54	0.20	9.60	6000	49.93	1.398	15.95	0.628	46.4
CD7038M48X		36~54	0.30	14.40	7000	58.53	1.639	22.02	0.867	50.6
CD7038H48X		36~54	0.35	16.80	8000	64.89	1.817	26.26	1.034	55.0
CD7038X48X		36~54	0.45	21.60	9000	73.25	2.051	32.62	1.284	57.5

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD