DC 40x40x28mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

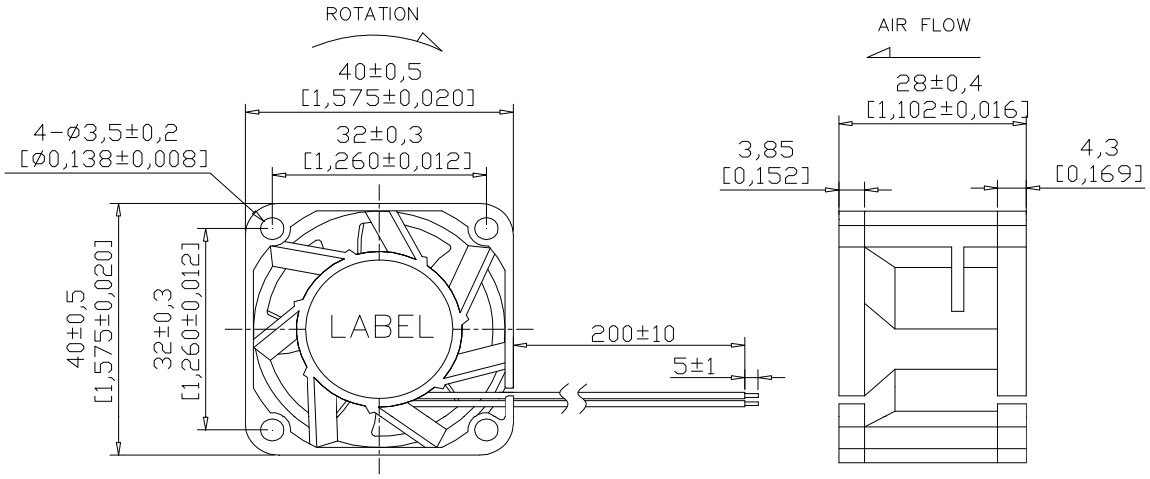

Air Flow - Static Pressure Characteristics

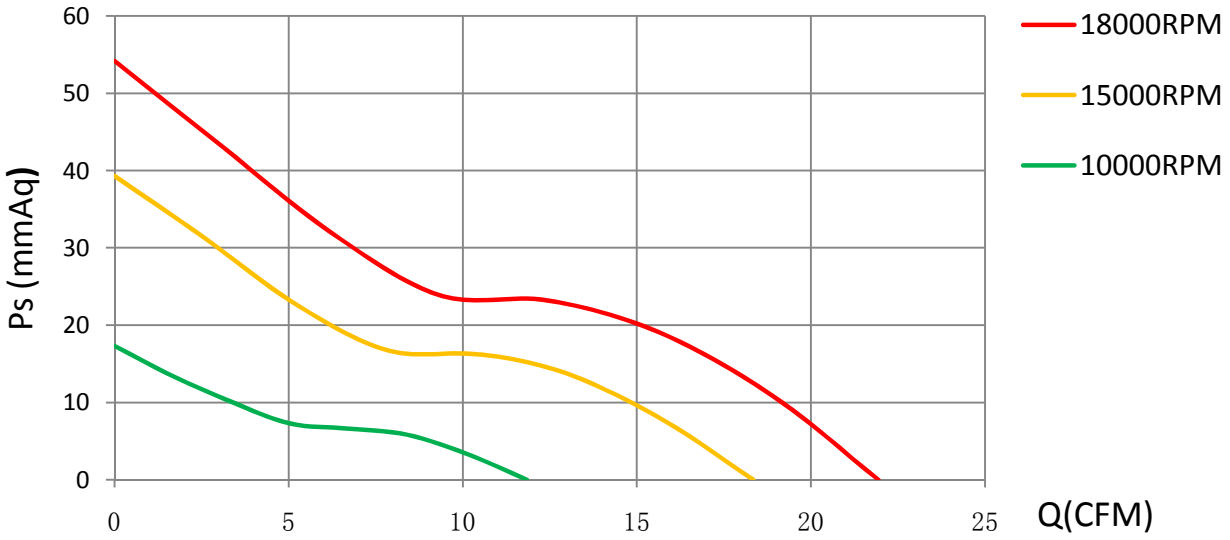

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD4028L12X	12	7~13.8	0.30	3.60	10000	11.84	0.332	17.32	0.696	43.9
CD4028M12X		7~13.8	0.55	6.60	15000	18.34	0.514	39.33	1.580	56.4
CD4028H12X		7~13.8	0.80	9.60	18000	21.94	0.614	54.17	2.189	59.2
CD4028L24X	24	12~25.6	0.20	4.80	10000	11.84	0.332	17.32	0.696	43.9
CD4028M24X		12~25.6	0.30	7.20	15000	18.34	0.514	39.33	1.580	56.4
CD4028H24X		12~25.6	0.40	9.60	18000	21.94	0.614	54.17	2.189	59.2

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD