DC Φ100x25mm - A

General Specifications

Material:……..Frame:Aluminium
Impeller: ……..Impeller:PC Plastic(UL94V2)
Expected Life: ……..Ball Bearing 50,000hrs (40℃)
Lead Wire: ……..+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～50℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……..FG Signal /RD Signal
Speed control mode: ……..PWM Control

Dimensions

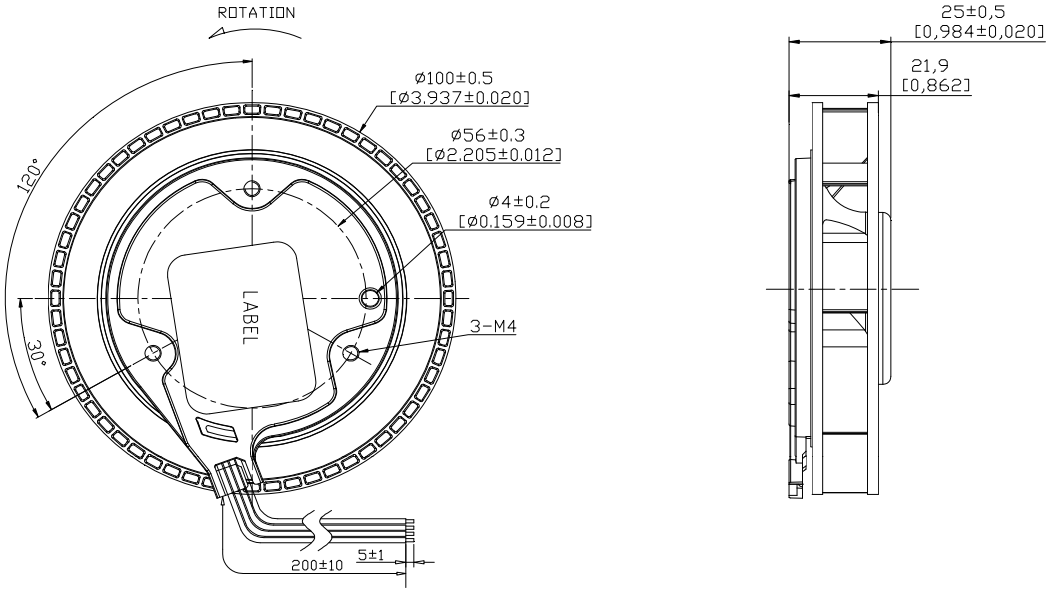

Air Flow - Static Pressure Characteristics

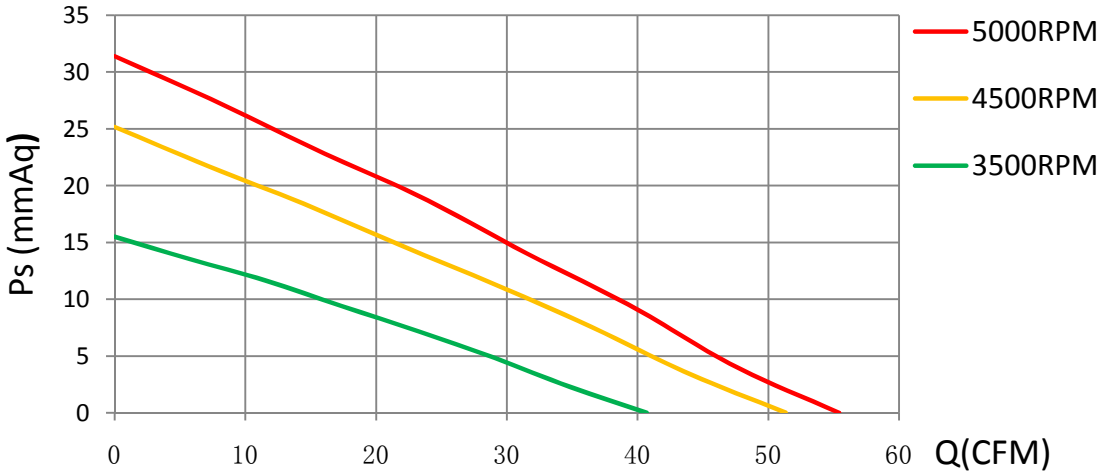

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB10025L12X	12	7~13.8	0.40	4.80	3500	40.71	1.140	15.49	0.629	47.4
CB10025M12X		7~13.8	0.60	7.20	4500	51.34	1.438	25.17	1.022	54.2
CB10025H12X		7~13.8	0.90	10.80	5000	55.34	1.550	31.38	1.241	57.8
CB10025L24X	24	12~25.6	0.20	4.80	3500	40.71	1.140	15.49	0.629	47.4
CB10025M24X		12~25.6	0.35	8.40	4500	51.34	1.438	25.17	1.022	54.2
CB10025H24X		12~25.6	0.50	12.00	5000	55.34	1.550	31.38	1.241	57.8

Specifications are subject to change without notice