DC Φ120x25mm - B

General Specifications

Material:……..Frame:Aluminium
Impeller: ……Impeller:PC Plastic(UL94V2)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～50℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

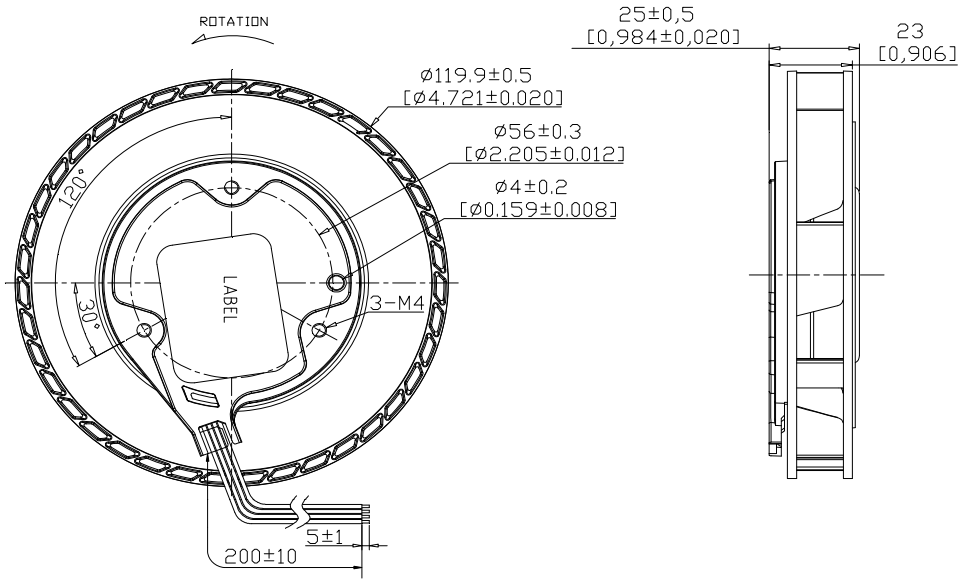

Air Flow - Static Pressure Characteristics

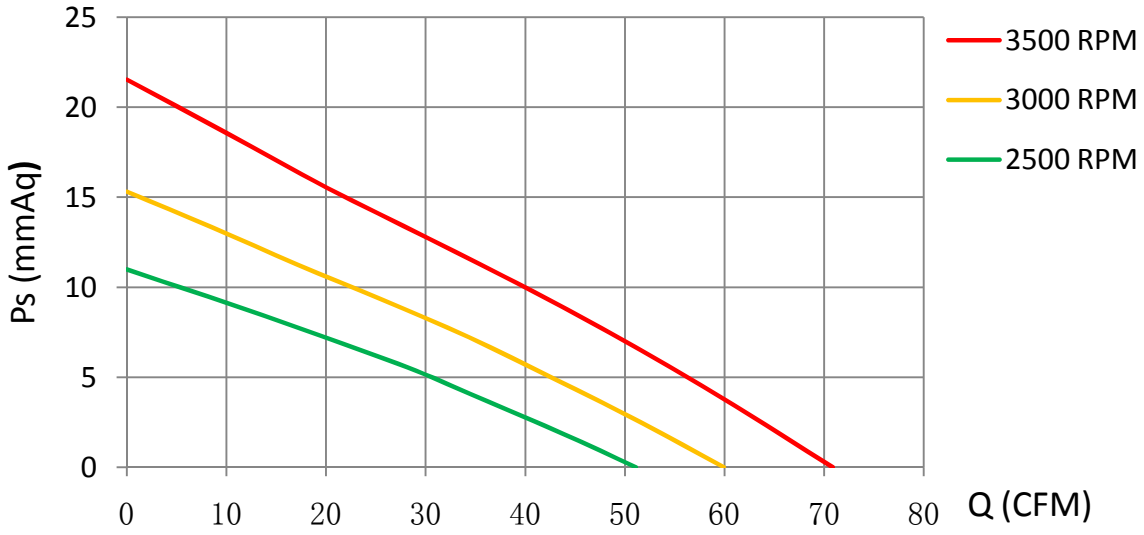

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB12025L12X	12	7~13.8	0.40	4.80	2500	51.12	1.431	10.99	0.446	47.1
CB12025M12X		7~13.8	0.70	8.40	3000	59.95	1.679	15.31	0.621	52.1
CB12025H12X		7~13.8	1.00	12.00	3500	70.88	1.985	21.54	0.875	56.8
CB12025L24X	24	12~25.6	0.30	7.20	2500	51.12	1.431	10.99	0.446	47.1
CB12025M24X		12~25.6	0.45	10.80	3000	59.95	1.679	15.31	0.621	52.1
CB12025H24X		12~25.6	0.65	15.60	3500	70.88	1.985	21.54	0.875	56.8

Specifications are subject to change without notice