DC Φ130x30mm - A

General Specifications

Material:……..Frame:Aluminium
Impeller: ……Impeller:PC Plastic(UL94V2)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～50℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

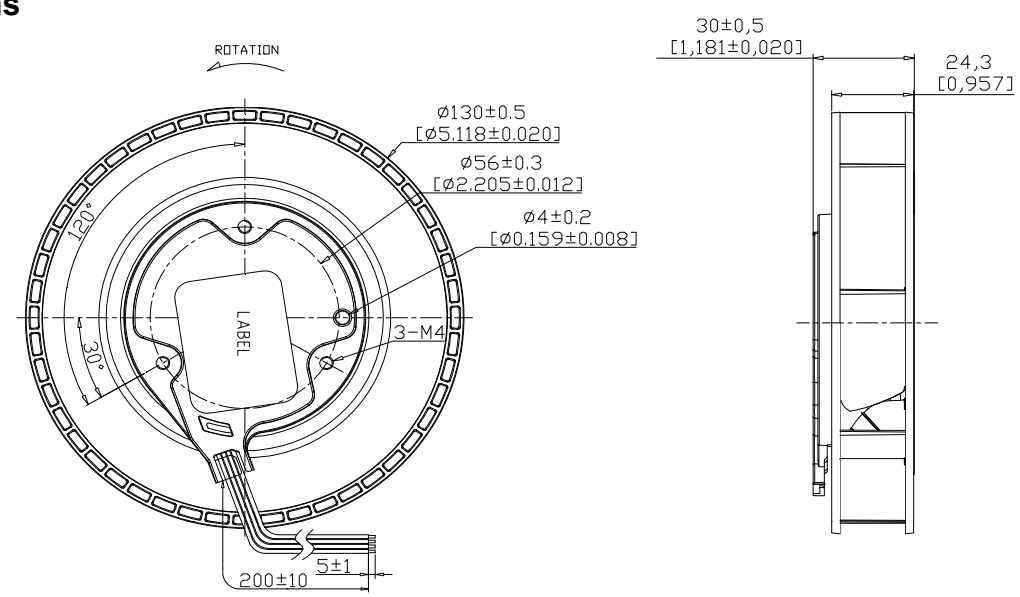

Air Flow - Static Pressure Characteristics

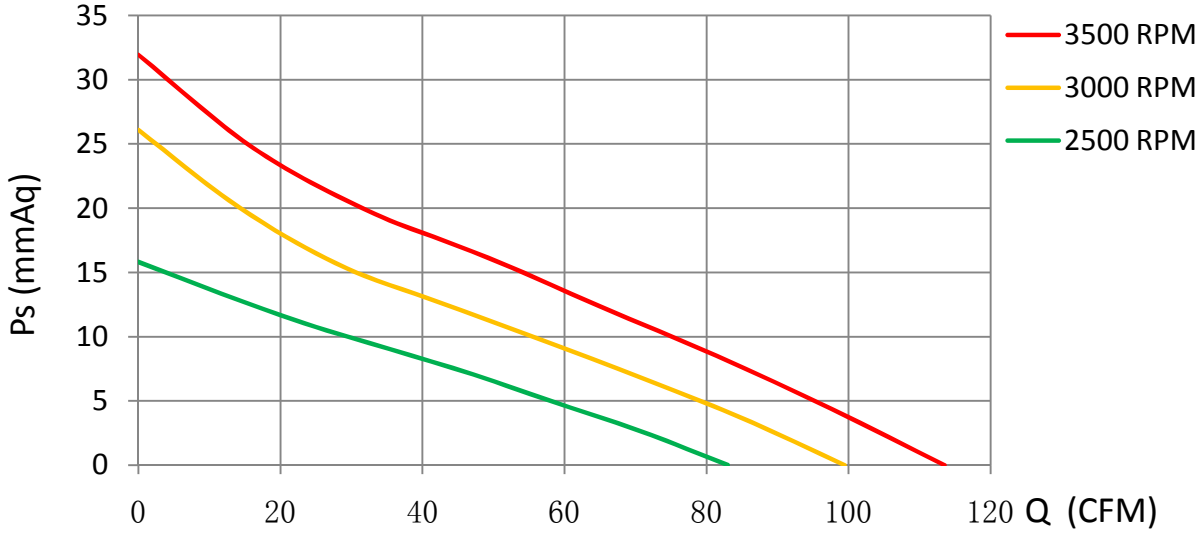

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB13030L12X	12	7~13.8	0.50	6.00	2500	83.01	2.324	15.83	0.641	51.8
CB13030M12X		7~13.8	0.90	10.80	3000	99.46	2.785	26.1	1.056	56.7
CB13030H12X		7~13.8	1.35	16.20	3500	113.51	3.178	31.95	1.296	60.7
CB13030L24X	24	12~25.6	0.30	7.20	2500	83.01	2.324	15.83	0.641	51.8
CB13030M24X		12~25.6	0.50	12.00	3000	99.46	2.785	26.1	1.056	56.7
CB13030H24X		12~25.6	0.80	19.20	3500	113.51	3.178	31.95	1.296	60.7

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD