DC 35x35x20mm - A

General Specifications

Material:……..Frame:Aluminium
Impeller: ……Impeller:Plastic(UL94V0)
Expected Life: …… Ball Bearing 50,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……..FG Signal /RD Signal
Speed control mode: ……..PWM Control

Dimensions

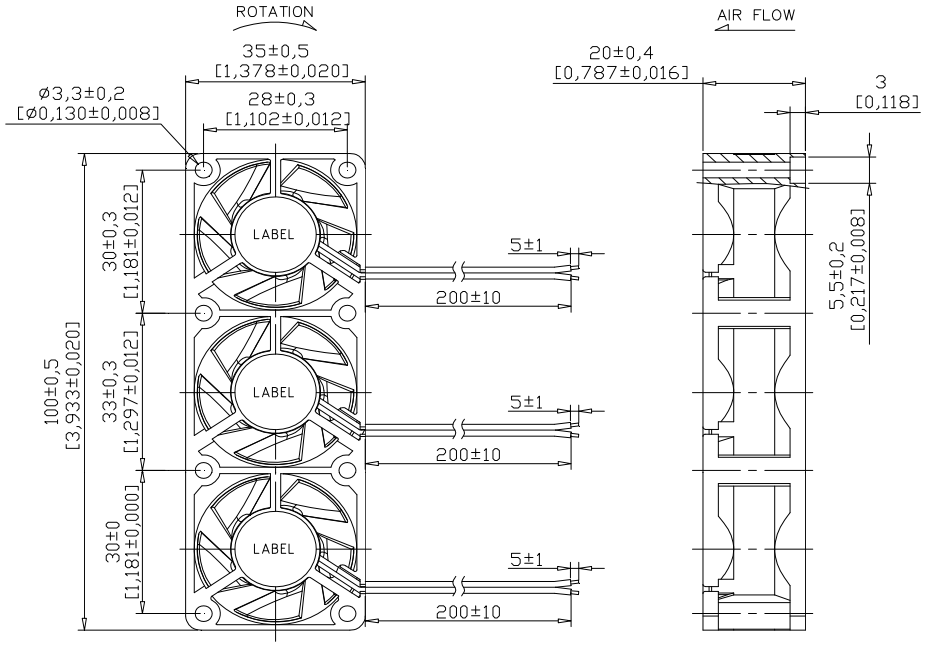

Air Flow - Static Pressure Characteristics

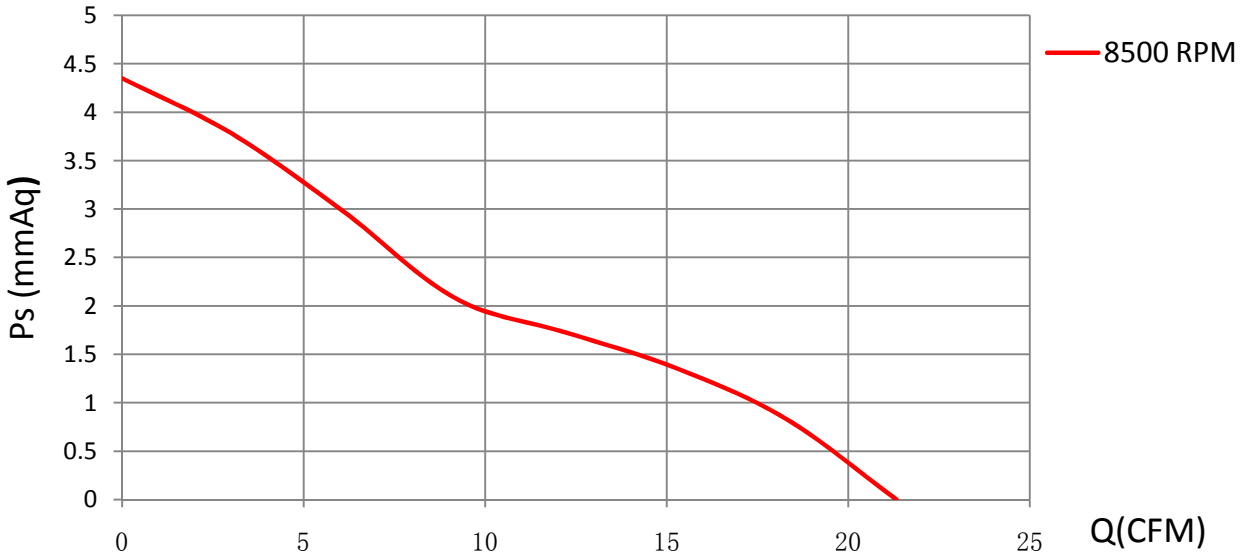

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (sum) (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD3520H12X	12	7~13.8	0.33	3.96	8500	21.33	0.597	4.35	0.174	33.5

Specifications are subject to change without notice

NIKCOOL
DONGGUAN YIJIN ELECTRONIC CO.,LTD