DC 60x60x25mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

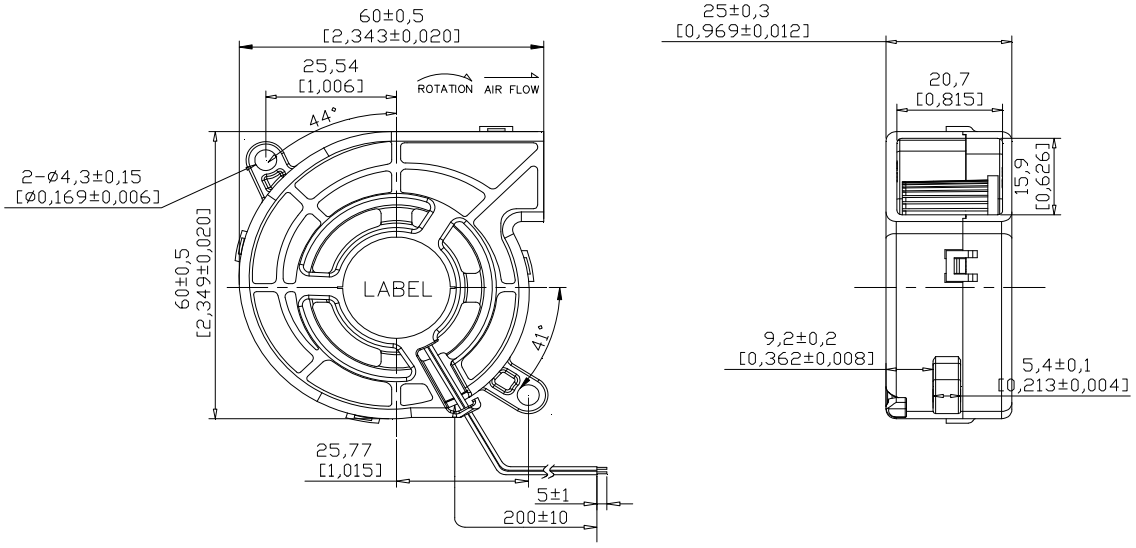

Air Flow - Static Pressure Characteristics

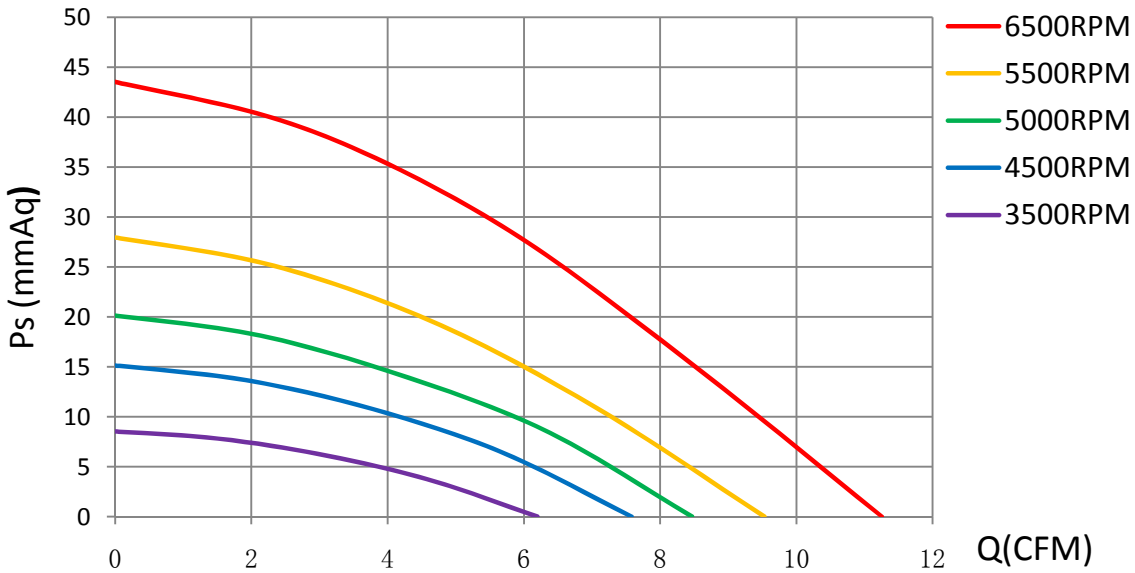

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB6025L12X	12	7~13.8	0.14	1.68	3500	6.20	0.174	8.53	0.336	30.7
CB6025M12X		7~13.8	0.22	2.64	4500	7.58	0.212	15.13	0.594	38.2
CB6025H12X		7~13.8	0.30	3.60	5000	8.47	0.237	20.14	0.793	41.6
CB6025L24X	24	12~25.6	0.15	3.60	4500	7.58	0.212	15.13	0.594	38.2
CB6025M24X		12~25.6	0.21	5.04	5500	9.53	0.267	27.95	1.101	44.5
CB6025H24X		12~25.6	0.28	6.72	6500	11.26	0.315	43.52	1.716	48.1

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD