DC 75x75x15mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

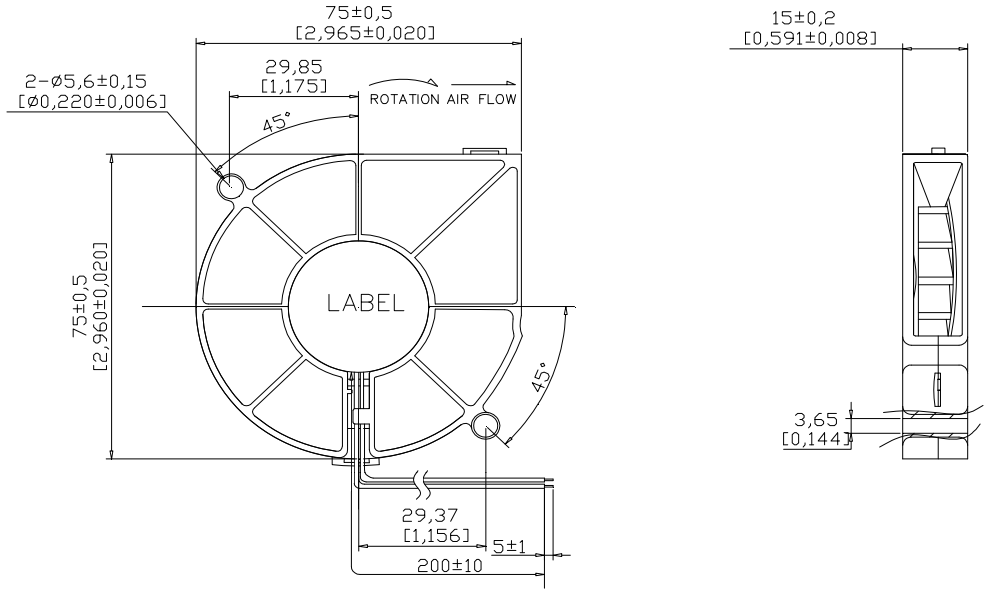

Air Flow - Static Pressure Characteristics

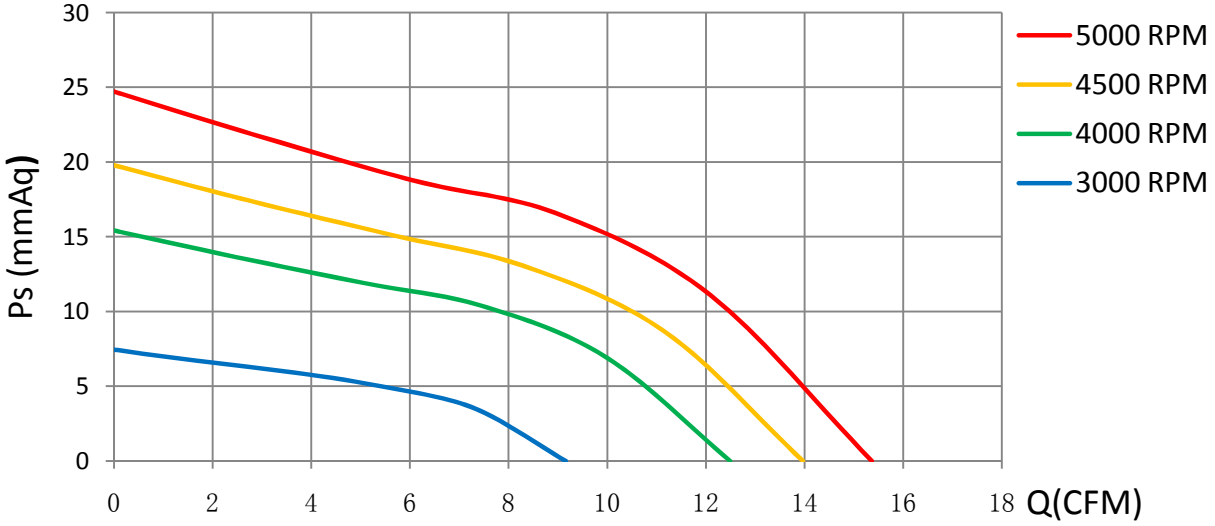

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB7515L12X	12	7~13.8	0.19	2.28	3000	9.16	0.256	7.45	0.303	38.1
CB7515M12X		7~13.8	0.26	3.12	4000	12.50	0.350	15.42	0.627	45.9
CB7515H12X		7~13.8	0.31	3.72	4500	13.97	0.391	19.78	0.804	48.7
CB7515L24X	24	12~25.6	0.20	4.80	4000	12.50	0.350	15.42	0.627	45.9
CB7515M24X		12~25.6	0.25	6.00	4500	13.97	0.391	19.78	0.804	48.7
CB7515H24X		12~25.6	0.30	7.20	5000	15.37	0.430	24.72	1.006	51.7

Specifications are subject to change without notice

NIKCOOL

DONGGUAN YIJIN ELECTRONIC CO.,LTD