DC 40x40x20mm - B

General Specifications

Material:……Frame:Plastic(UL94V0)
Impeller: ……Impeller:Plastic(UL94V0)
Expected Life: ……FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……..Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……..PWM Control

Dimensions

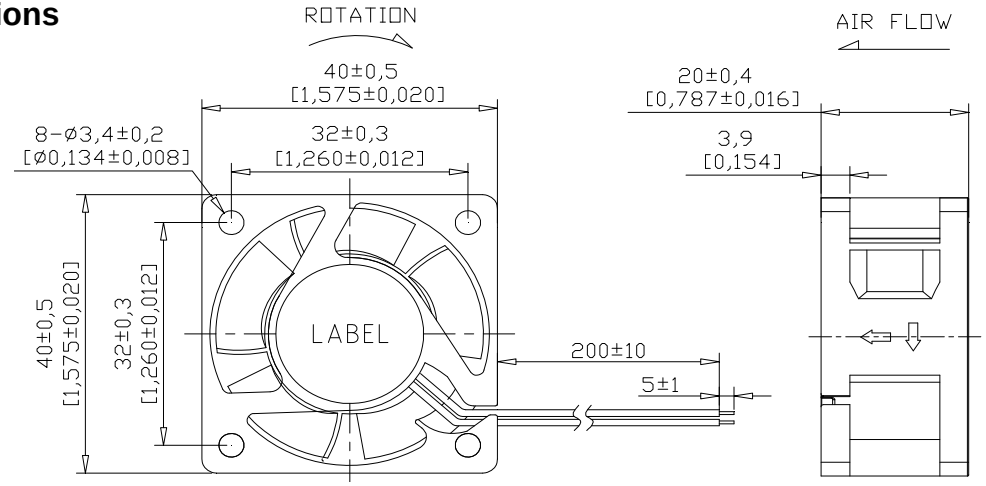

Air Flow - Static Pressure Characteristics

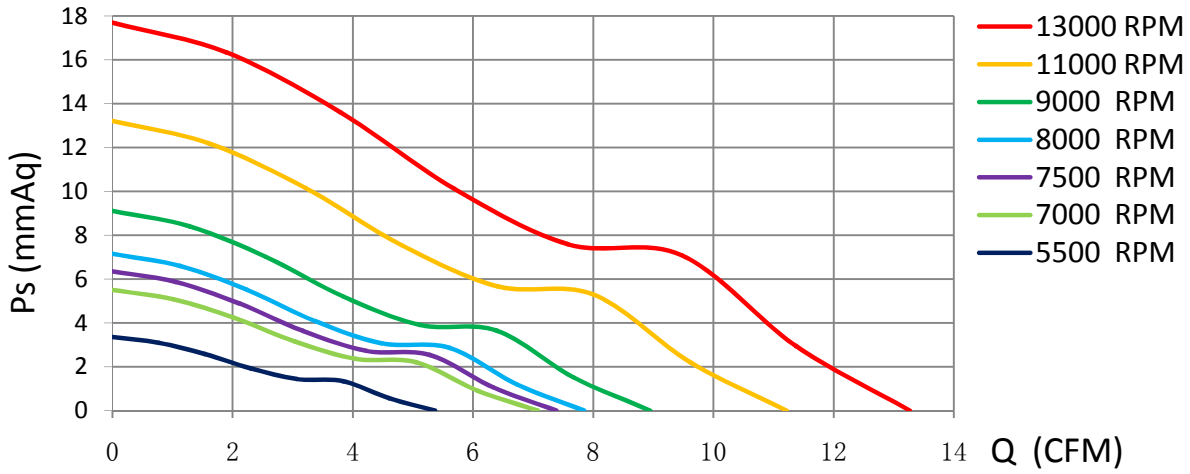

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD4020L05X	5	4~5.5	0.16	0.80	5500	5.37	0.150	3.35	0.14	23.0
CD4020M05X		4~5.5	0.26	1.30	7500	7.39	0.207	6.35	0.27	32.3
CD4020H05X		4~5.5	0.36	1.80	9000	8.95	0.251	9.11	0.385	36.8
CD4020L12X	12	7~13.8	0.16	1.92	7000	7.08	0.198	5.50	0.232	30.5
CD4020M12X		7~13.8	0.22	2.64	8000	7.85	0.220	7.15	0.302	34.0
CD4020H12X		7~13.8	0.32	3.84	9000	8.95	0.251	9.11	0.385	36.8
CD4020X12X		7~13.8	0.42	5.04	11000	11.22	0.314	13.21	0.559	42.8
CD4020L24X	24	12~25.6	0.07	1.68	7000	7.08	0.198	5.50	0.232	30.5
CD4020M24X		12~25.6	0.11	2.64	9000	8.95	0.251	9.11	0.385	36.8
CD4020H24X		12~25.6	0.14	3.36	11000	11.22	0.314	13.21	0.559	42.8
CD4020X24X		12~25.6	0.17	4.08	13000	13.27	0.372	17.69	0.749	47.2

Specifications are subject to change without notice