DC 60x60x15mm - C

General Specifications

Material:……...Frame:Plastic(UL94V0)
Impeller: ……...Impeller:Plastic(UL94V0)
Expected Life: ……...FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: ……...+red -black or yellow Signal,blue Speed control
Temperature Range: ……...Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……...FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

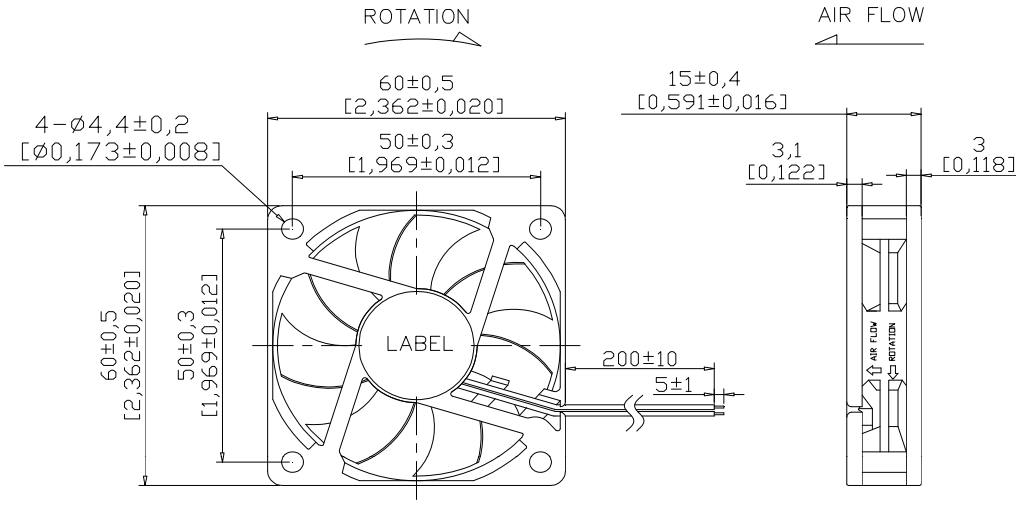

Air Flow - Static Pressure Characteristics

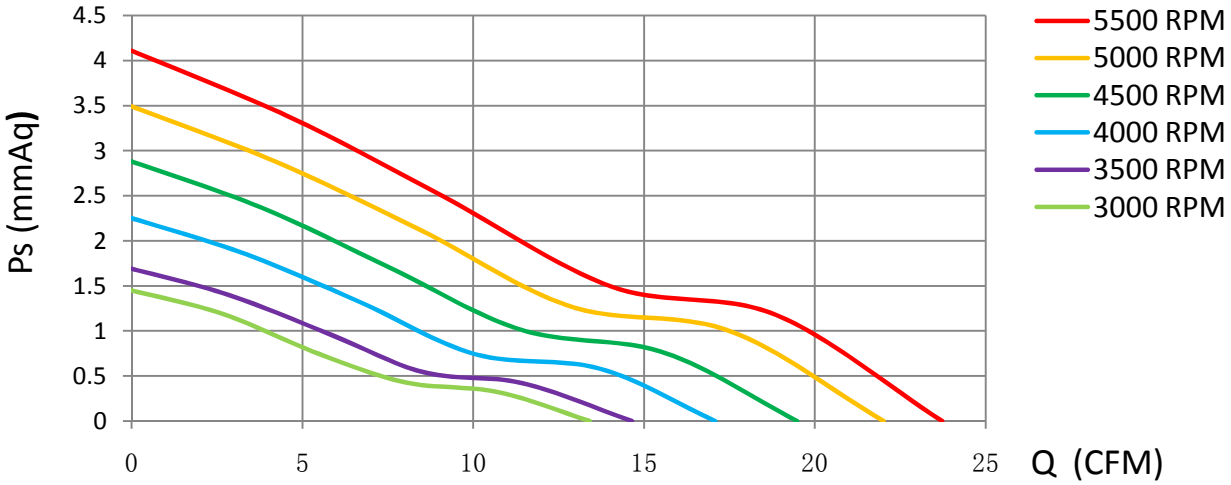

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD6015L05X	5	4~5.5	0.10	0.50	3000	13.41	0.375	1.45	0.059	22.8
CD6015M05X		4~5.5	0.20	1.00	3500	14.65	0.410	1.69	0.069	26.1
CD6015H05X		4~5.5	0.30	1.50	4000	17.08	0.478	2.25	0.091	30.4
CD6015L12X	12	7~13.8	0.20	2.40	4500	19.48	0.545	2.88	0.117	33.1
CD6015M12X		7~13.8	0.30	3.60	5000	22.01	0.616	3.49	0.141	36.1
CD6015H12X		7~13.8	0.40	4.80	5500	23.73	0.664	4.11	0.167	38.9
CD6015L24X	24	12~25.6	0.10	2.40	4500	19.48	0.545	2.88	0.117	33.1
CD6015M24X		12~25.6	0.17	4.08	5000	22.01	0.616	3.49	0.141	36.1
CD6015H24X		12~25.6	0.24	5.76	5500	23.73	0.664	4.11	0.167	38.9

Specifications are subject to change without notice

NIKCOOL