DC 60x60x20mm - B

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

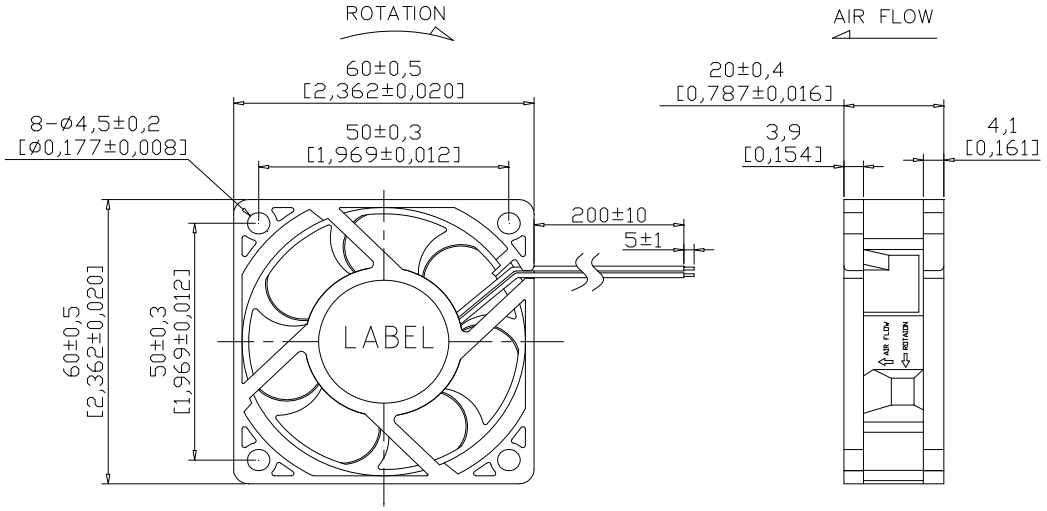

Air Flow - Static Pressure Characteristics

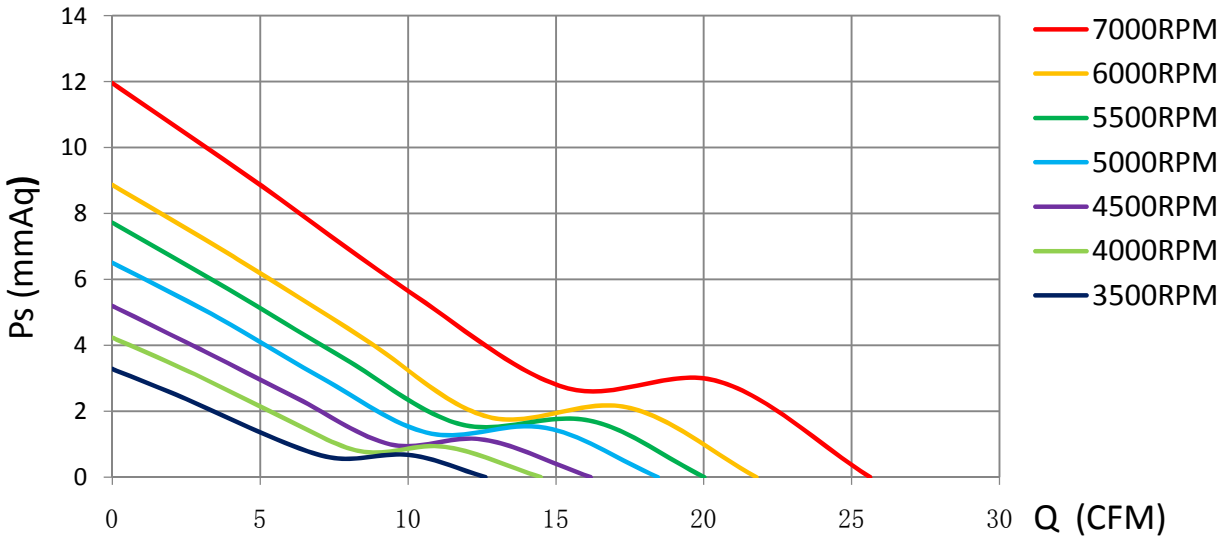

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD6020L05X	5	4~5.5	0.12	0.60	3500	12.61	0.353	3.28	0.133	29.0
CD6020M05X		4~5.5	0.20	1.00	4000	14.49	0.406	4.24	0.171	32.2
CD6020H05X		4~5.5	0.30	1.50	4500	16.18	0.453	5.20	0.210	36.2
CD6020L12X	12	7~13.8	0.19	2.28	4500	16.18	0.453	5.20	0.210	36.2
CD6020M12X		7~13.8	0.32	3.84	5500	20.02	0.561	7.72	0.312	41.8
CD6020H12X		7~13.8	0.45	5.40	7000	25.62	0.717	11.96	0.484	47.6
CD6020L24X	24	12~25.6	0.10	2.40	5000	18.45	0.517	6.51	0.263	38.9
CD6020M24X		12~25.6	0.16	3.84	6000	21.78	0.610	8.87	0.359	44.1
CD6020H24X		12~25.6	0.22	5.28	7000	25.62	0.717	11.96	0.484	47.6

Specifications are subject to change without notice

NIKCOOL