


DC 60x60x38mm - A

General Specifications


Material:.....Frame:Plastic(UL94V0)
Impeller:Impeller:Plastic(UL94V0)
Expected Life:FDB Bearing 60,000hrs (40°C)
Ball Bearing 50,000hrs (40°C)
Lead Wire:red -black or yellow Signal,blue Speed control
Temperature Range:Operating temperature -10°C~70°C(Humidity 35%~85%RH)
Storage temperature -30°C~70°C(Humidity 35%~85%RH)
Signal output:FG Signal /RD Signal
Speed control mode:PWM Control



Dimensions

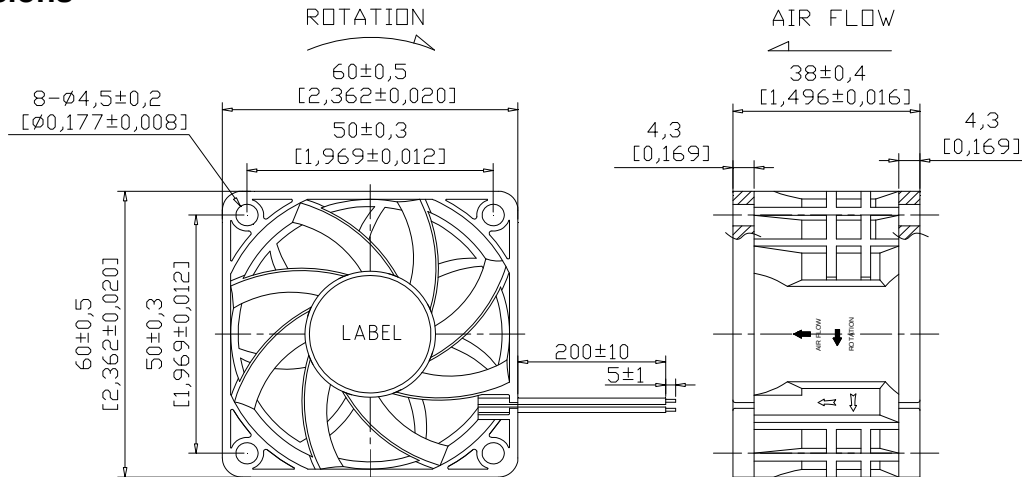

Air Flow - Static Pressure Characteristics

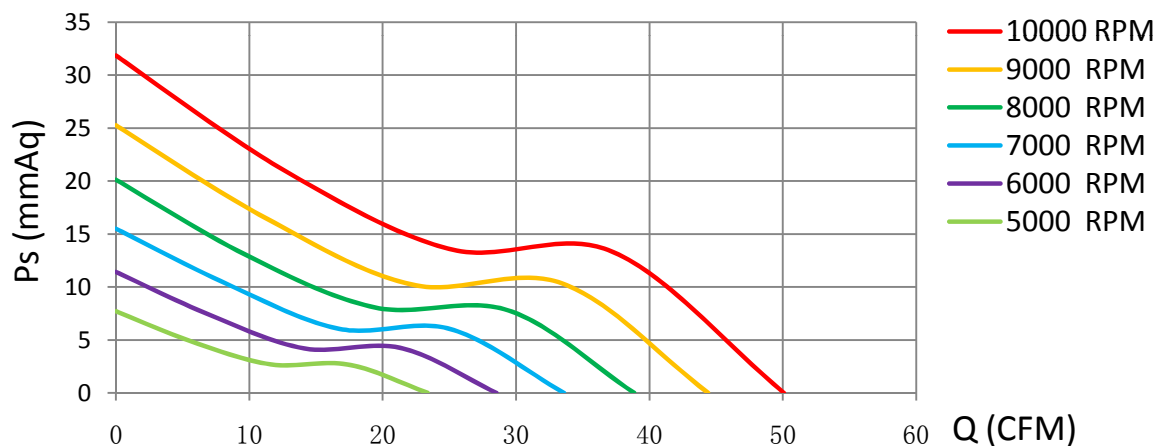

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m ³ /min	(mmH ₂ O)	inch-H ₂ O	
CD6038E12X	12	7~13.8	0.30	3.60	5000	23.36	0.654	7.70	0.303	43.5
CD6038L12X		7~13.8	0.45	5.40	6000	28.54	0.799	11.42	0.450	48.5
CD6038M12X		7~13.8	0.65	7.80	7000	33.59	0.941	15.51	0.611	52.2
CD6038H12X		7~13.8	0.95	11.40	8000	38.84	1.088	20.13	0.793	55.1
CD6038X12X		7~13.8	1.20	14.40	9000	44.39	1.243	25.26	0.994	58.4
CD6038U12X		7~13.8	1.50	18.00	10000	50.09	1.403	31.85	1.254	60.8
CD6038L24X	24	12~25.6	0.20	4.80	6000	28.54	0.799	11.42	0.450	48.5
CD6038M24X		12~25.6	0.30	7.20	7000	33.59	0.941	15.51	0.611	52.2
CD6038H24X		12~25.6	0.40	9.60	8000	38.84	1.088	20.13	0.793	55.1
CD6038X24X		12~25.6	0.50	12.00	9000	44.39	1.243	25.26	0.994	58.4
CD6038U24X		12~25.6	0.70	16.80	10000	50.09	1.403	31.85	1.254	60.8
CD6038L48X	48	36~54	0.15	7.20	7000	33.59	0.941	15.51	0.611	52.2
CD6038M48X		36~54	0.25	12.00	8000	38.84	1.088	20.13	0.793	55.1
CD6038H48X		36~54	0.35	16.80	9000	44.39	1.243	25.26	0.994	58.4
CD6038X48X		36~54	0.45	21.60	10000	50.09	1.403	31.85	1.254	60.8

Specifications are subject to change without notice



DONGGUAN YIJIN ELECTRONIC CO.,LTD