DC 200x200x60mm - A

General Specifications

Material:.....Frame:Aluminium
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....Ball Bearing 50,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

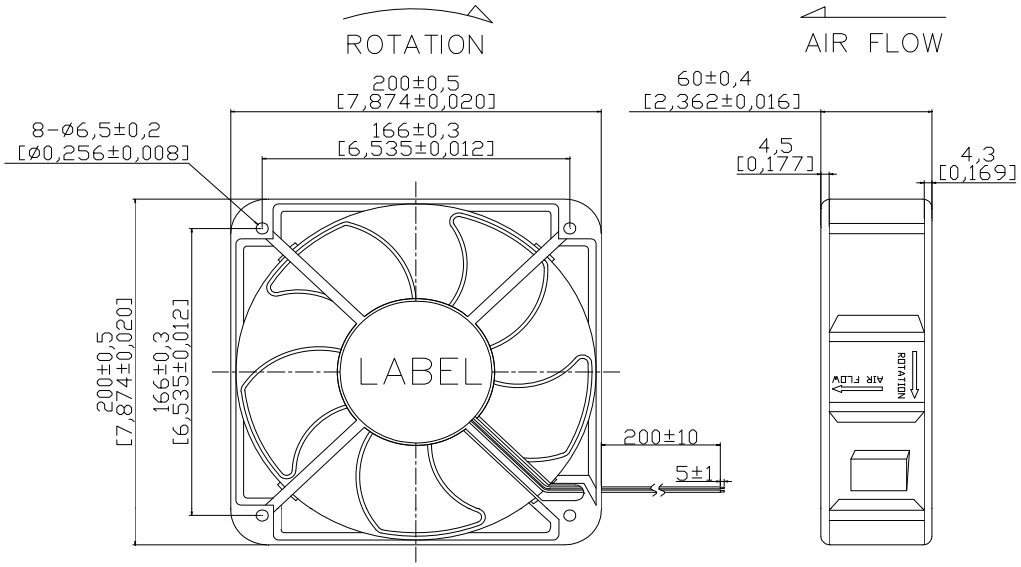

Air Flow - Static Pressure Characteristics

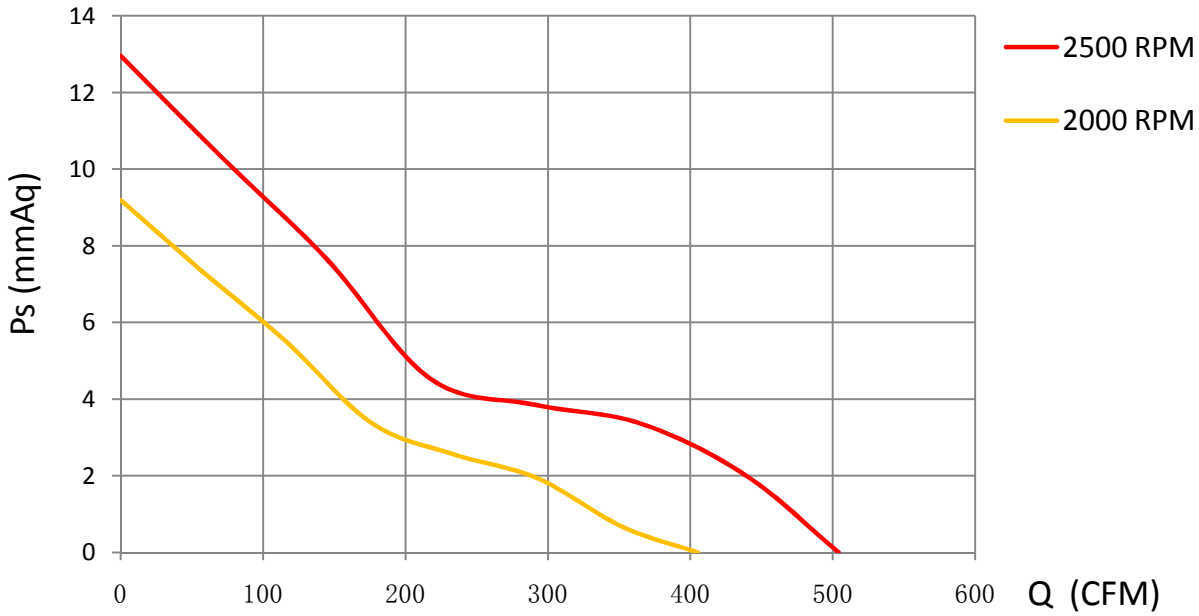

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD20060L24X	24	12~25.6	1.00	24.00	2000	405.24	11.470	9.19	0.362	54.0
CD20060M24X		12~25.6	1.60	38.40	2500	504.32	14.27	12.96	0.510	58.9
CD20060L48X	48	36~54	0.50	24.00	2000	405.24	11.470	9.19	0.362	54.0
CD20060M48X		36~54	0.80	38.40	2500	504.32	14.27	12.96	0.510	58.9

Specifications are subject to change without notice

NIKCOOL
DONGGUAN YIJIN ELECTRONIC CO.,LTD