DC Φ150x75mm - A

General Specifications

Material:……Frame:Aluminium
Impeller: ……Impeller:PA66 Plastic(UL94V0)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Motor Control Method.....FOC Three-Phase Motor
IP Class Protection.....IP44; installation- and position-dependent
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: …….Operating temperature -10℃～60℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal / RD Signal (Open Collector Output)
Speed control mode: …….Vsp:0~10 V ~ 10V PWM Control

External Dimension

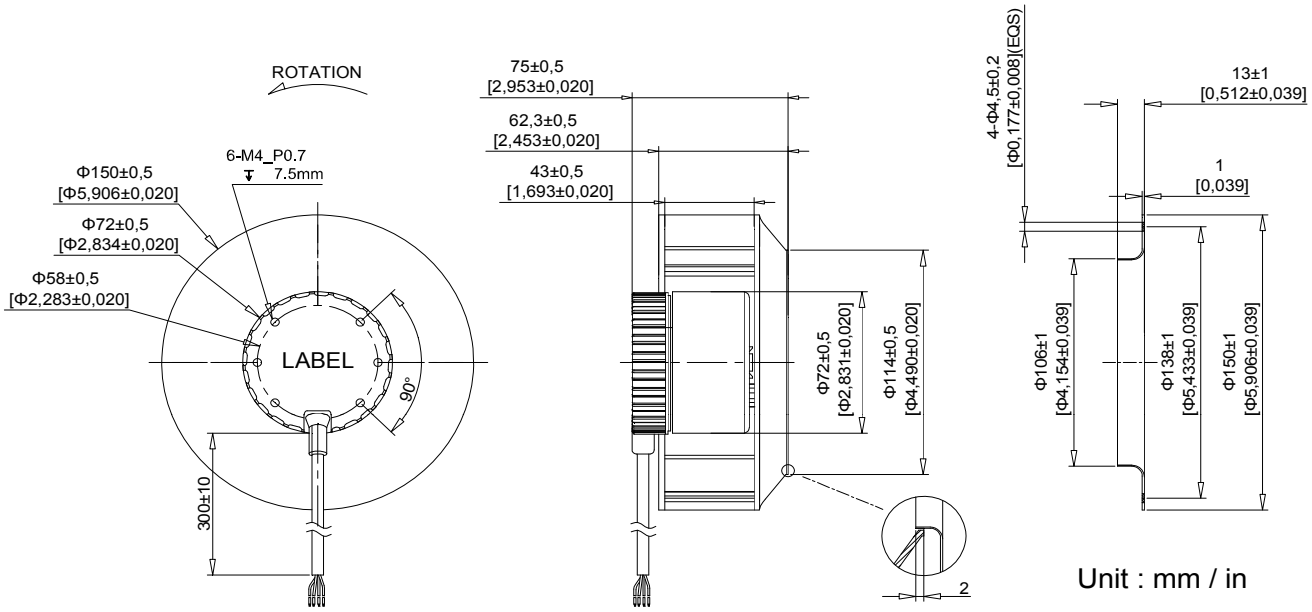

Unit : mm / in

Air Flow - Static Pressure Characteristics

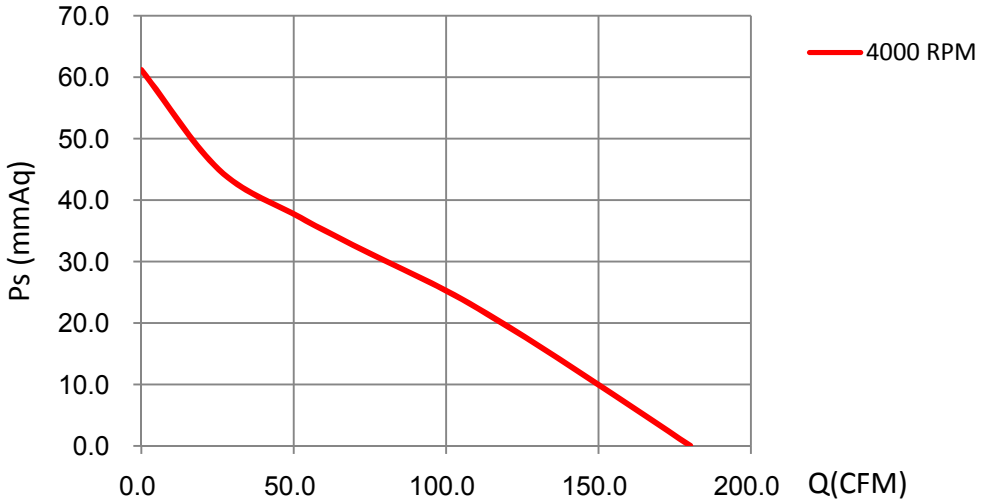

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB15075H24X	24	12~25.6	1.80	43.20	4000	180.12	5.043	61.18	2.411	70.0
CB15075H48X	48	36~54	1.00	48.00	4000	180.12	5.043	61.18	2.411	70.0

Specifications are subject to change without notice

NIKCOOL
www.nikcool.cn
DONGGUAN YIJIN ELECTRONIC CO.,LTD