


# DC 35x35x20mm - A

## General Specifications


Material:.....Frame:Aluminium  
 Impeller: .....Impeller:Plastic(UL94V0)  
 Expected Life: ..... Ball Bearing 50,000hrs (40°C)  
 Lead Wire: .....+red -black or yellow Signal,blue Speed control  
 Temperature Range: .....Operating temperature -10°C~70°C(Humiditumidity 35%~85%RH)  
 .....Storage temperature -30°C~70°C(Humiditumidity 35%~85%RH)  
 Signal output: .....FG Signal /RD Signal  
 Speed control mode: .....PWM Control



## Dimensions

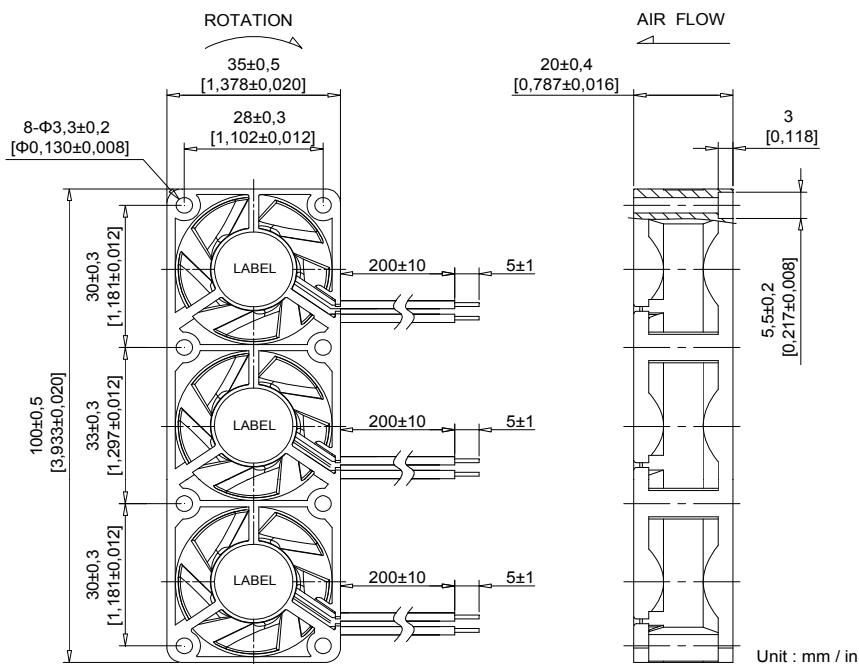

## Air Flow - Static Pressure Characteristics

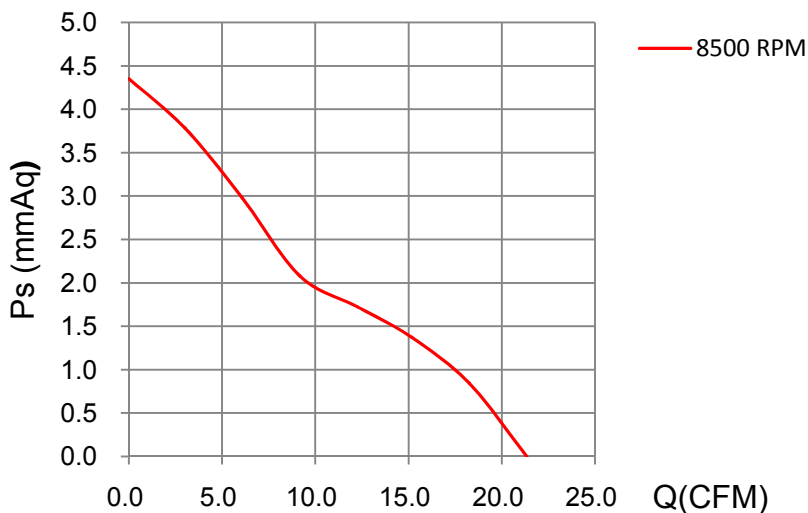

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (sum) (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m <sup>3</sup> /min	(mmH2O)	inch-H2O	
CD3520H12X	12	7~13.8	0.33	3.96	8500	21.33	0.597	4.35	0.174	33.5

Specifications are subject to change without notice



www.nikcool.cn

DONGGUAN YIJIN ELECTRONIC CO.,LTD