DC 40x40x20mm - C

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

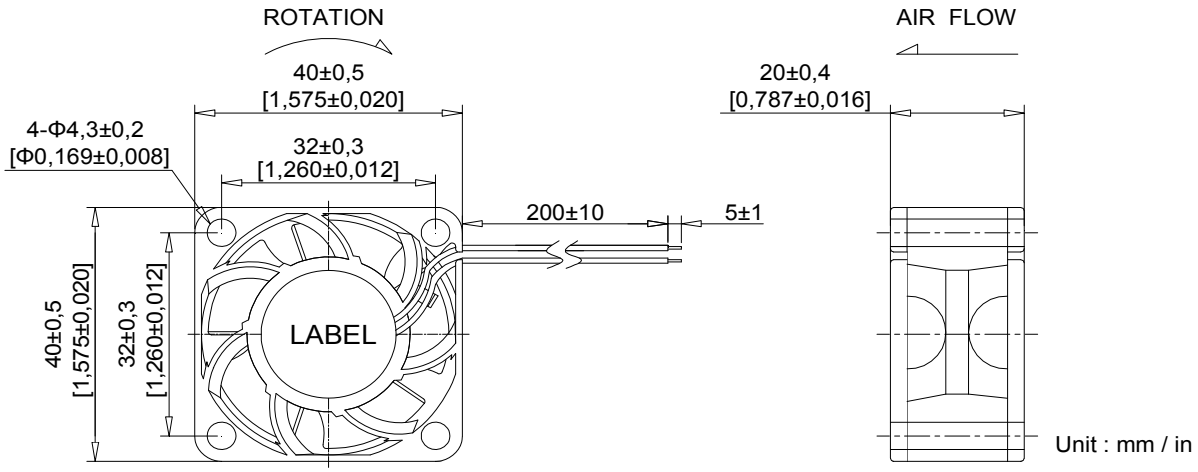

Air Flow - Static Pressure Characteristics

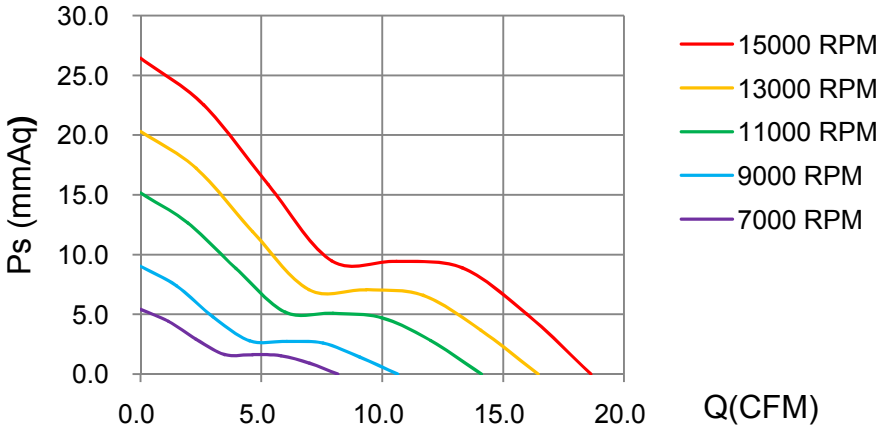

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD4020E12X	12	7~13.8	0.16	1.92	7000	8.16	0.228	5.41	0.216	34.1
CD4020L12X		7~13.8	0.22	2.64	9000	10.63	0.298	9.03	0.361	40.5
CD4020M12X		7~13.8	0.32	3.84	11000	14.10	0.395	15.17	0.606	45.3
CD4020H12X		7~13.8	0.42	5.04	13000	16.45	0.461	20.30	0.810	48.8
CD4020X12X		7~13.8	0.48	5.76	15000	18.63	0.522	26.45	1.055	52.6
CD4020E12X	24	12~25.6	0.08	1.92	7000	8.16	0.228	5.41	0.216	34.1
CD4020L24X		12~25.6	0.11	2.64	9000	10.63	0.298	9.03	0.361	40.5
CD4020M24X		12~25.6	0.15	3.60	11000	14.10	0.395	15.17	0.606	45.3
CD4020H24X		12~25.6	0.18	4.32	13000	16.45	0.461	20.30	0.810	48.8
CD4020X24X		12~25.6	0.22	5.28	15000	18.63	0.522	26.45	1.055	52.6

Specifications are subject to change without notice