DC 40x40x10mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ..... FG Signal /RD Signal
Speed control mode: ..... PWM Control

Dimensions

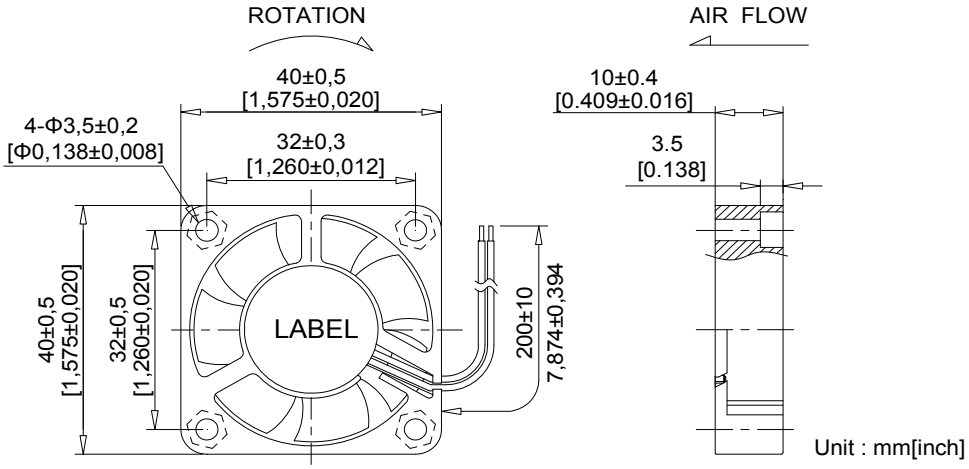

Air Flow - Static Pressure Characteristics

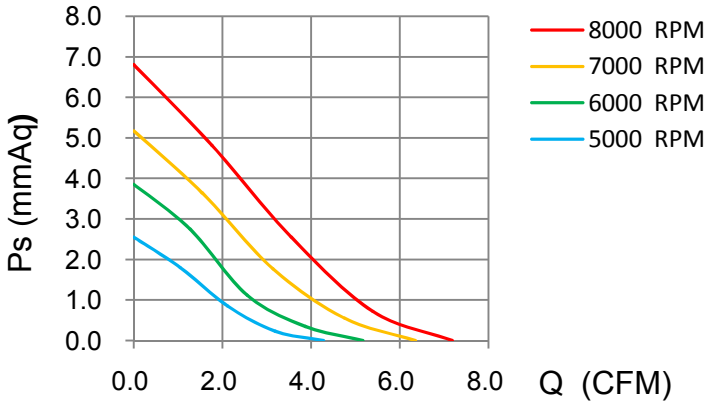

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level
						(CFM)	m^3/min	(mmH2O)	inch-H2O	dB(A)
CD4010E05X	5	4~5.5	0.08	0.40	5000	4.28	0.120	2.55	0.102	23.9
CD4010L05X		4~5.5	0.10	0.50	6000	5.17	0.145	3.85	0.154	29.6
CD4010M05X		4~5.5	0.14	0.70	7000	6.35	0.178	5.17	0.207	33.5
CD4010H05X		4~5.5	0.22	1.10	8000	7.18	0.201	6.81	0.272	36.5
CD4010E12X	12	7~13.8	0.05	0.60	5000	4.28	0.120	2.55	0.102	23.9
CD4010L12X		7~13.8	0.07	0.84	6000	5.17	0.145	3.85	0.154	29.6
CD4010M12X		7~13.8	0.10	1.20	7000	6.35	0.178	5.17	0.207	33.5
CD4010H12X		7~13.8	0.13	1.56	8000	7.18	0.201	6.81	0.272	36.5
CD4010E24X	24	12~25.6	0.04	0.96	5000	4.28	0.120	2.55	0.102	23.9
CD4010L24X		12~25.6	0.06	1.44	6000	5.17	0.145	3.85	0.154	29.6
CD4010M24X		12~25.6	0.08	1.92	7000	6.35	0.178	5.17	0.207	33.5
CD4010H24X		12~25.6	0.10	2.40	8000	7.18	0.201	6.81	0.272	36.5

Specifications are subject to change without notice