DC 45x45x15mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

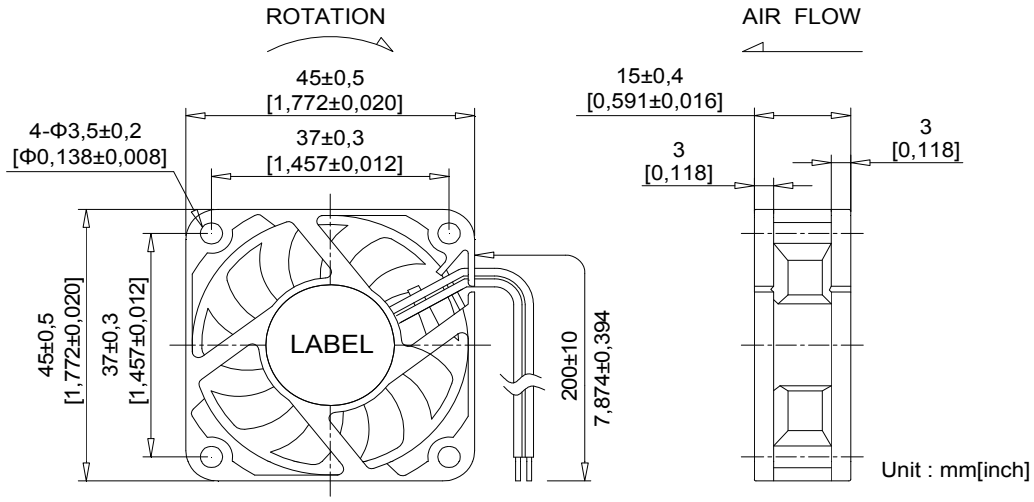

Air Flow - Static Pressure Characteristics

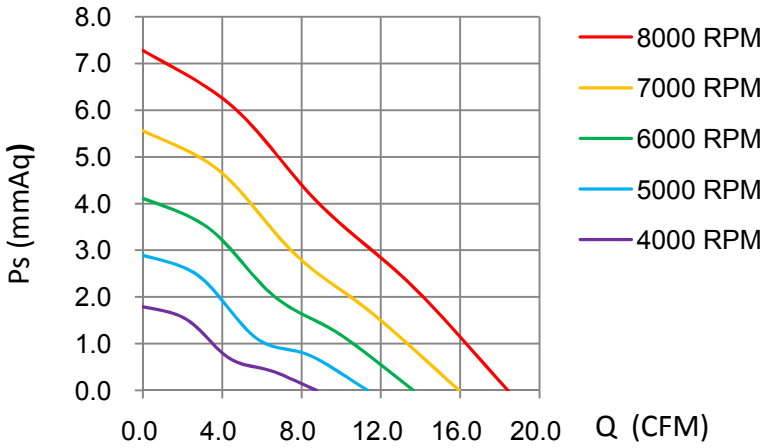

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD4515L05X	5	4~5.5	0.15	0.75	4000	8.74	0.245	1.79	0.073	22.5
CD4515M05X		4~5.5	0.25	1.25	5000	11.33	0.317	2.89	0.118	28.7
CD4515H05X		4~5.5	0.35	1.75	6000	13.64	0.382	4.11	0.168	32.1
CD4515L12X	12	7~13.8	0.12	1.44	5000	11.33	0.317	2.89	0.118	28.7
CD4515M12X		7~13.8	0.17	2.04	6000	13.64	0.382	4.11	0.168	32.1
CD4515H12X		7~13.8	0.22	2.64	7000	15.94	0.446	5.56	0.227	38.5
CD4515L24X	24	12~25.6	0.09	2.16	6000	13.64	0.382	4.11	0.168	32.1
CD4515M24X		12~25.6	0.12	2.88	7000	15.94	0.446	5.56	0.227	38.5
CD4515H24X		12~25.6	0.15	3.60	8000	18.40	0.515	7.28	0.298	40.4

Specifications are subject to change without notice