DC 92x92x25mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

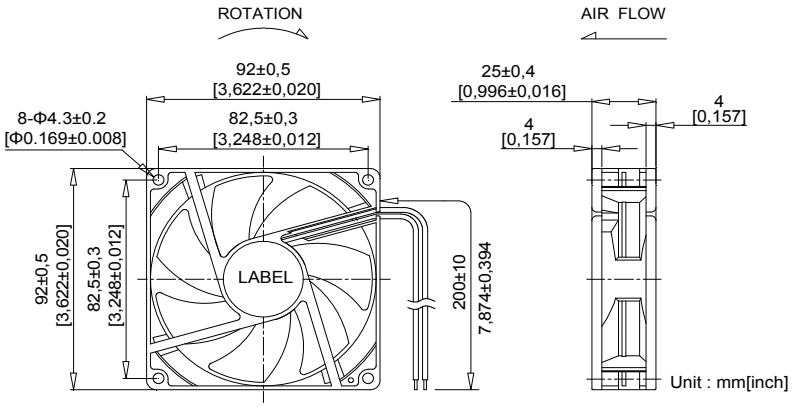

Air Flow - Static Pressure Characteristics

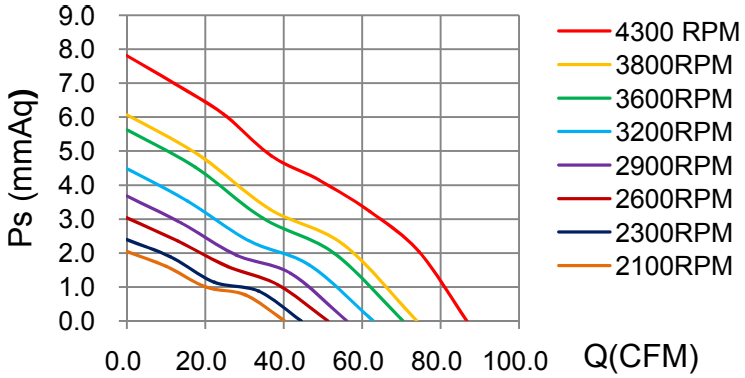

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9225E12X	12	7~13.8	0.10	1.20	2100	40.20	1.126	2.04	0.080	27.8
CD9225L12X		7~13.8	0.20	2.40	2600	51.23	1.434	3.03	0.119	33.6
CD9225M12X		7~13.8	0.30	3.60	3200	62.85	1.760	4.49	0.177	39.7
CD9225H12X		7~13.8	0.40	4.80	3600	70.44	1.972	5.63	0.222	44.8
CD9225X12X		7~13.8	0.65	7.80	4300	86.71	2.428	7.82	0.308	47.9
CD9225E24X	24	12~25.6	0.12	2.88	2300	44.52	1.247	2.39	0.094	30.10
CD9225L24X		12~25.7	0.15	3.60	2900	56.08	1.570	3.67	0.144	35.60
CD9225M24X		12~25.8	0.19	4.56	3600	70.44	1.972	5.63	0.222	44.80
CD9225H24X		12~25.9	0.22	5.28	3800	73.91	2.069	6.07	0.239	46.10
CD9225X24X		12~25.9	0.46	5.46	4300	86.71	2.428	7.82	0.308	47.9
CD9225E48X	48	28~56	0.10	4.80	2300	44.52	1.247	2.39	0.094	30.10
CD9225L48X		28~56	0.13	6.24	2900	56.08	1.570	3.67	0.144	35.60
CD9225M48X		28~56	0.17	8.16	3600	70.44	1.972	5.63	0.222	44.80
CD9225H48X		28~56	0.20	9.60	3800	73.91	2.069	6.07	0.239	46.10
CD9225X48X		28~56	0.32	3.86	4300	86.71	2.428	7.82	0.308	47.9

Specifications are subject to change without notice