DC 92x92x25mm - D

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

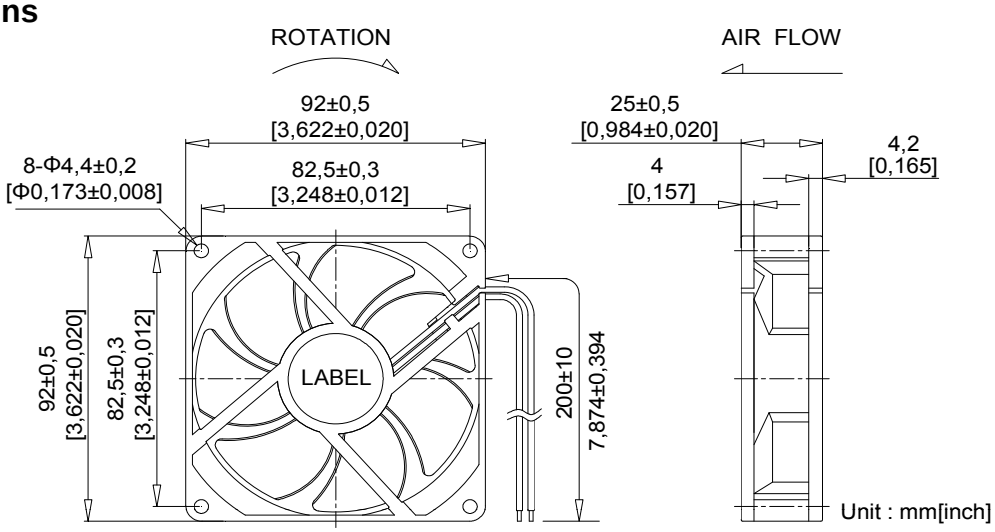

Air Flow - Static Pressure Characteristics

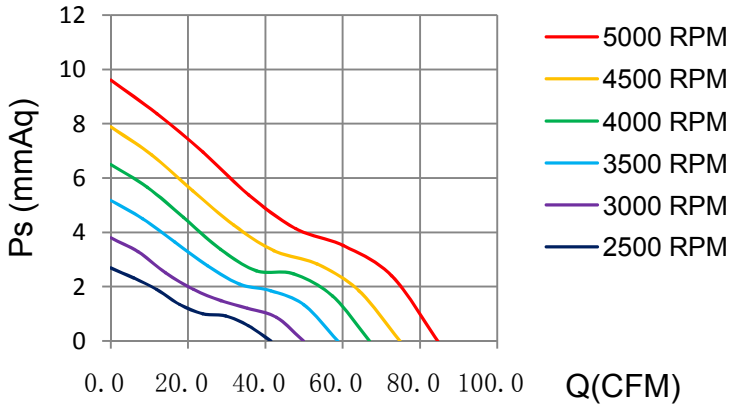

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9225L12X	12	7~13.8	0.20	2.40	2500	41.44	1.160	2.690	0.106	38.0
CD9225M12X		7~13.8	0.30	3.60	3000	49.90	1.397	3.800	0.150	40.2
CD9225H12X		7~13.8	0.40	4.80	4000	66.95	1.875	6.490	0.256	47.1
CD9225X12X		7~13.8	0.50	6.00	5000	84.61	2.369	9.600	0.378	54.0
CD9225L24X	24	12~25.6	0.10	2.30	3500	58.73	1.644	5.180	0.204	44.2
CD9225M24X		12~25.6	0.14	3.46	4000	66.95	1.875	6.490	0.256	47.1
CD9225H24X		12~25.6	0.19	4.61	4500	74.83	2.095	7.880	0.310	50.4
CD9225X24X		12~25.6	0.24	5.76	5000	84.61	2.369	9.600	0.378	54.0
CD9225L48X	48	36~54	0.07	3.32	4000	66.95	1.875	6.490	0.256	47.1
CD9225M48X		36~54	0.09	4.42	4500	74.83	2.095	7.880	0.310	50.4
CD9225H48X		36~54	0.12	5.53	5000	84.61	2.369	9.600	0.378	54.0

Specifications are subject to change without notice