DC 92x92x32mm - A

General Specifications

Material: .....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range:.....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output:.....FG Signal /RD Signal
Speed control mode:.....PWM Control

Dimensions

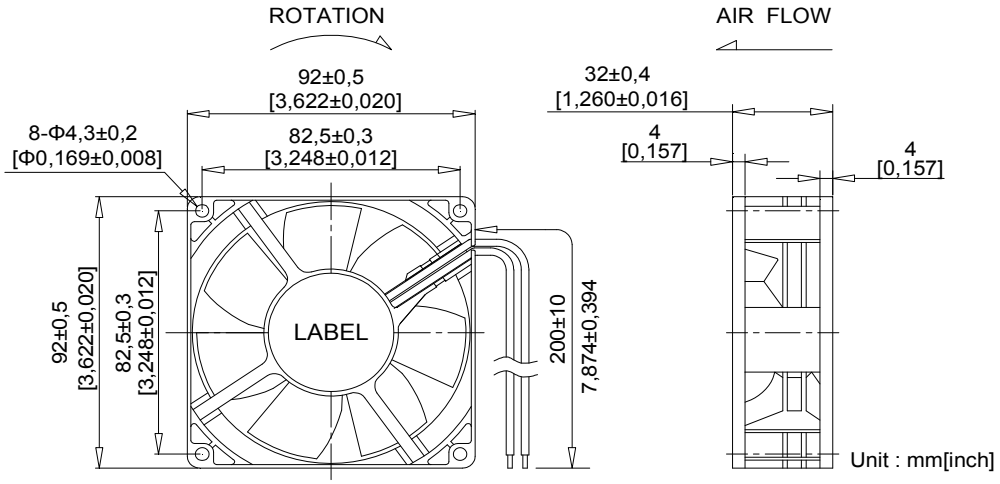

Air Flow - Static Pressure Characteristics

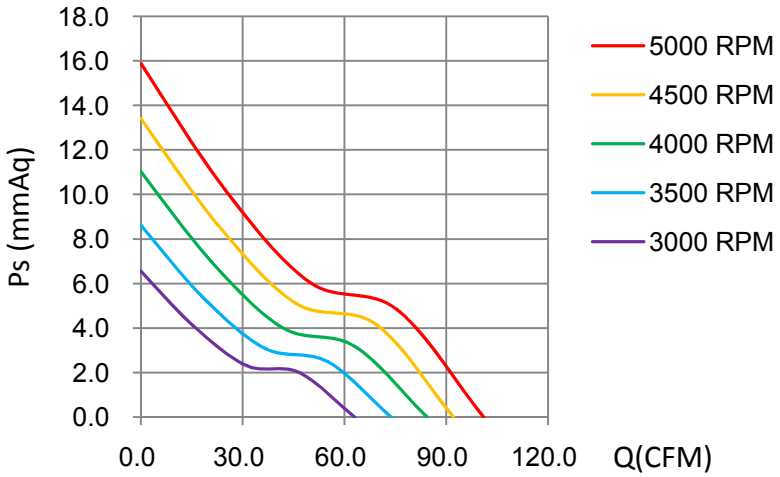

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9232L12X	12	7~13.8	0.35	4.20	3000	63.04	1.765	6.55	0.258	39.4
CD9232M12X		7~13.8	0.49	5.88	3500	73.75	2.065	8.62	0.339	42.8
CD9232H12X		7~13.8	0.68	8.16	4000	84.32	2.361	11.03	0.434	47.0
CD9232L24X	24	12~25.6	0.25	6.00	3500	73.75	2.065	8.62	0.339	42.8
CD9232M24X		12~25.6	0.37	8.88	4000	84.32	2.361	11.03	0.434	47.0
CD9232H24X		12~25.6	0.48	11.52	4500	92.17	2.581	13.42	0.528	50.5
CD9232L48X	48	28~56	0.18	8.64	4000	84.32	2.361	11.03	0.434	47.0
CD9232M48X		28~56	0.23	11.04	4500	92.17	2.581	13.42	0.528	50.5
CD9232H48X		28~56	0.29	13.92	5000	101.03	2.829	15.89	0.626	53.5

Specifications are subject to change without notice