DC 172x152x51mm - D

General Specifications

Material:……Frame:Aluminium
Impeller: ……Impeller:Plastic(UL94V0)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

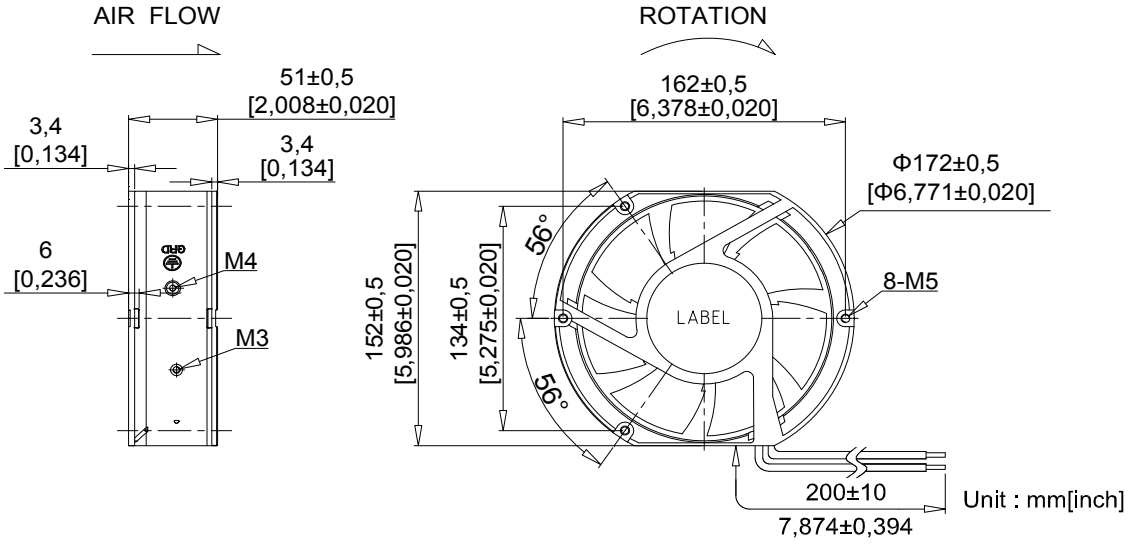

Air Flow - Static Pressure Characteristics

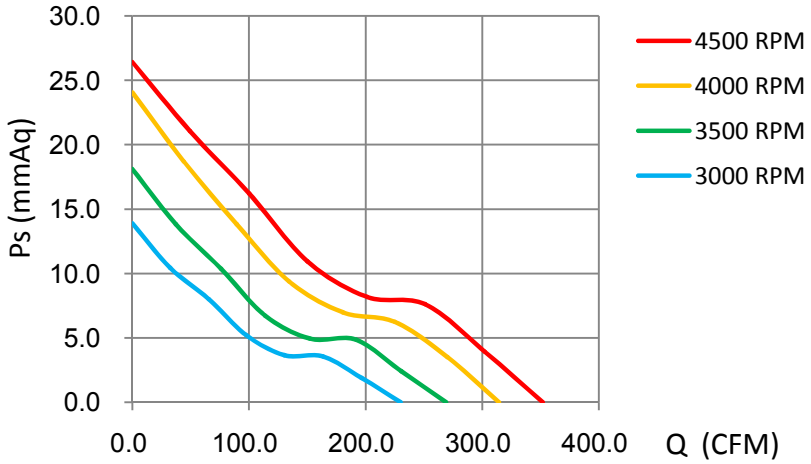

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD17251L24X	24	12~25.6	0.90	21.60	3000	230.23	6.515	13.89	0.547	55.5
CD17251M24X		12~25.6	1.70	40.80	3500	269.11	7.615	18.12	0.713	59.5
CD17251H24X		12~25.6	2.30	55.20	4000	314.45	8.898	24.08	0.948	62.8
CD17251X24X		12~25.6	2.80	67.20	4500	351.91	9.958	26.44	1.041	65.6
CD17251L48X	48	36~54	0.45	21.60	3000	230.23	6.515	13.89	0.547	55.5
CD17251M48X		36~54	0.80	38.40	3500	269.11	7.615	18.12	0.713	59.5
CD17251H48X		36~54	1.00	48.00	4000	314.45	8.898	24.08	0.948	62.8
CD17251X48X		36~54	1.40	67.20	4500	351.91	9.958	26.44	1.041	65.6

Specifications are subject to change without notice