DC 92x92x25mm - C

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

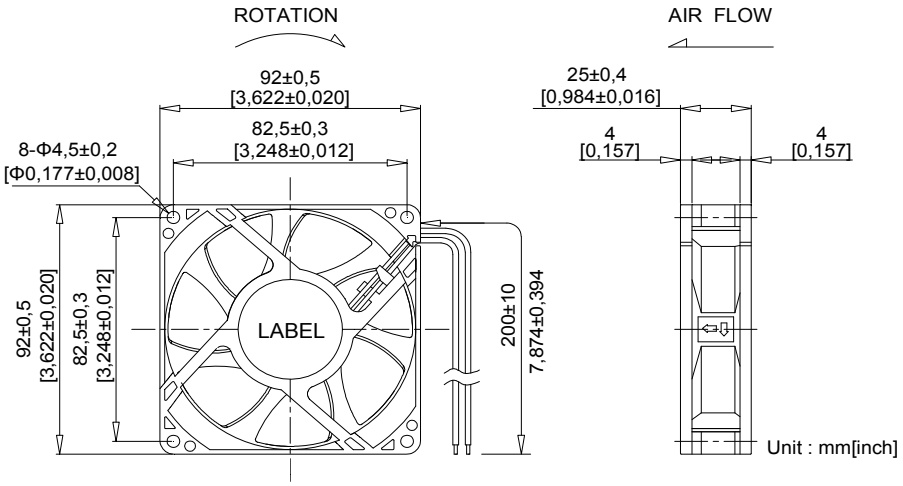

Air Flow - Static Pressure Characteristics

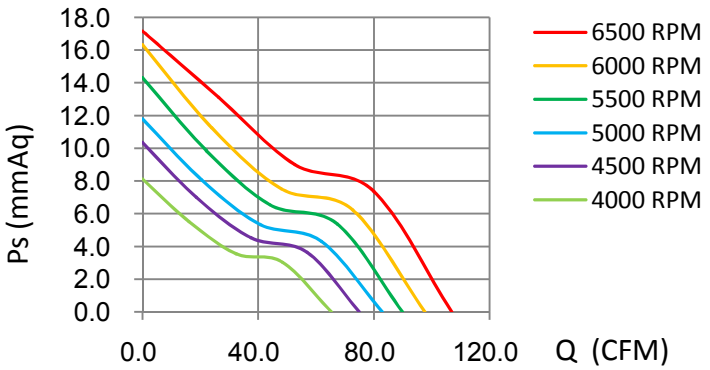

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD9225E12X	12	7~13.8	0.35	4.20	4000	65.38	1.831	8.11	0.319	42.0
CD9225L12X		7~13.8	0.45	5.40	4500	74.97	2.099	10.34	0.407	44.9
CD9225M12X		7~13.8	0.55	6.60	5000	82.93	2.322	11.80	0.465	48.0
CD9225H12X		7~13.8	0.70	8.40	5500	89.88	2.517	14.32	0.564	50.4
CD9225X12X		7~13.8	0.75	9.00	6000	97.66	2.734	16.33	0.643	52.9
CD9225L24X	24	12~25.6	0.30	7.20	5000	82.93	2.322	11.80	0.465	48.0
CD9225M24X		12~25.6	0.40	9.60	5500	89.88	2.517	14.32	0.564	50.4
CD9225H24X		12~25.6	0.50	12.00	6000	97.66	2.734	16.33	0.643	52.9
CD9225X24X		12~25.6	0.60	14.40	6500	106.93	2.994	17.16	0.676	54.9
CD9225L48X	48	36~54	0.15	7.20	5000	82.93	2.322	11.80	0.465	48.0
CD9225M48X		36~54	0.20	9.60	5500	89.88	2.517	14.32	0.564	50.4
CD9225H48X		36~54	0.25	12.00	6000	97.66	2.734	16.33	0.643	52.9
CD9225X48X		36~54	0.30	14.40	6500	106.93	2.994	17.16	0.676	54.9

Specifications are subject to change without notice