DC 40x40x15mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

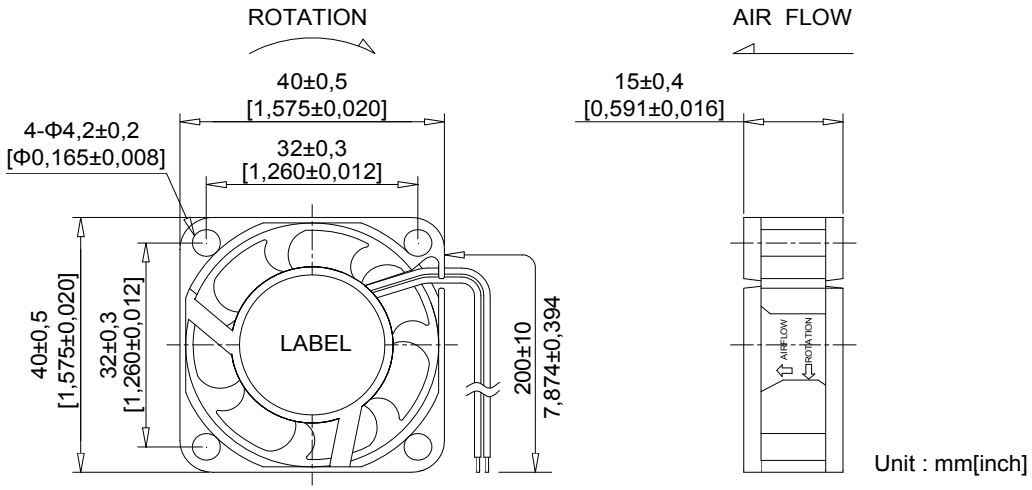

Unit : mm[inch]

Air Flow - Static Pressure Characteristics

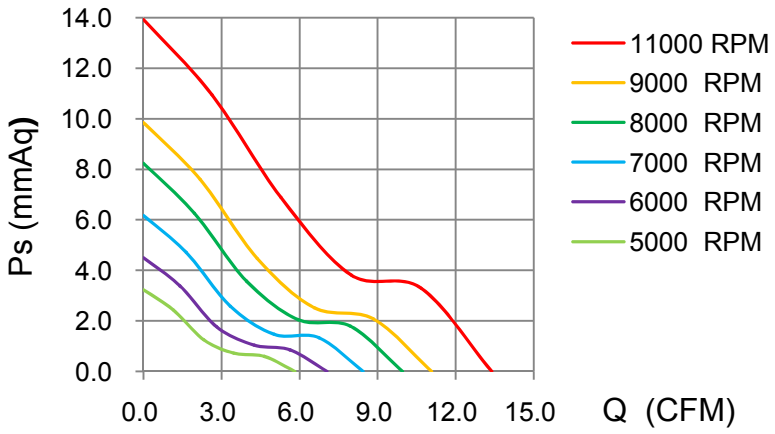

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD4015L05X	5	4~5.5	0.10	0.50	5000	5.82	0.163	3.24	0.131	22.6
CD4015M05X		4~5.5	0.19	0.95	6000	7.05	0.197	4.50	0.182	27.9
CD4015H05X		4~5.5	0.25	1.25	7000	8.44	0.236	6.17	0.250	34.0
CD4015L12X	12	7~13.8	0.10	1.20	7000	8.44	0.236	6.17	0.250	34.0
CD4015M12X		7~13.8	0.16	1.92	8000	9.96	0.279	8.23	0.333	36.6
CD4015H12X		7~13.8	0.24	2.88	9000	11.07	0.310	9.84	0.398	38.9
CD4015X12X		7~13.8	0.33	3.96	11000	13.39	0.375	13.92	0.564	44.1
CD4015L24X	24	12~25.6	0.06	1.44	7000	8.44	0.236	6.17	0.250	34.0
CD4015M24X		12~25.6	0.11	2.64	9000	11.07	0.310	9.84	0.398	38.9
CD4015H24X		12~25.6	0.15	3.60	11000	13.39	0.375	13.92	0.564	44.1

Specifications are subject to change without notice