


General Specifications


Material:.....Frame:Plastic(UL94V0)
Impeller:Impeller:Plastic(UL94V0)
Expected Life:FDB Bearing 60,000hrs (40℃)
 Long Life Bearing 25,000hrs (40℃)
Lead Wire:+red -black or yellow Signal,blue Speed control
Temperature Range:Operating temperature -10℃~70℃(Humiditumidity 35%~85%RH)
 Storage temperature -30℃~70℃(Humiditumidity 35%~85%RH)
Signal output:FG Signal /RD Signal
Speed control mode:PWM Control



Dimensions

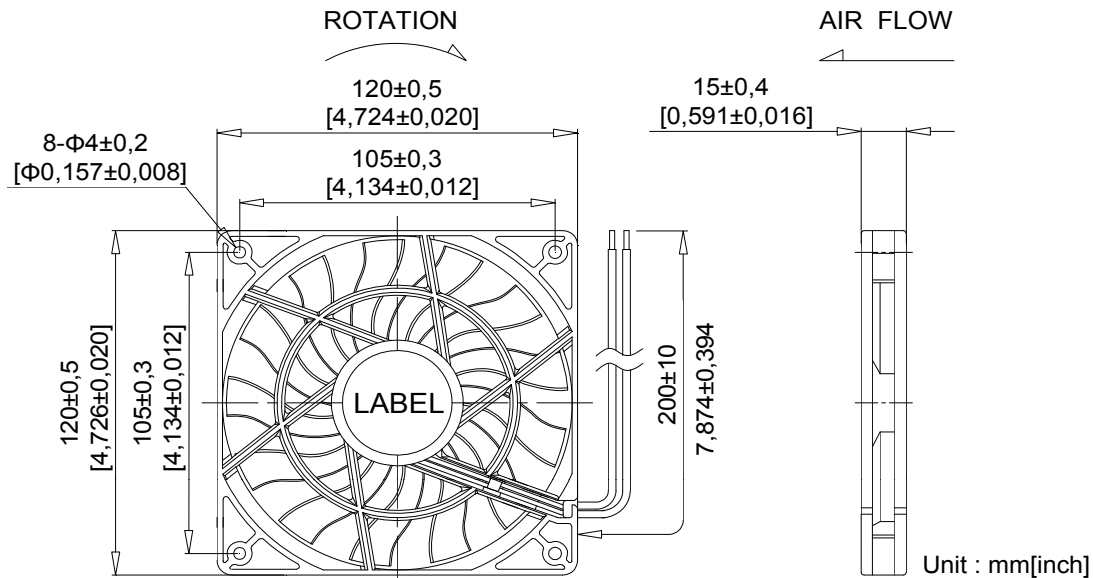

Air Flow - Static Pressure Characteristics

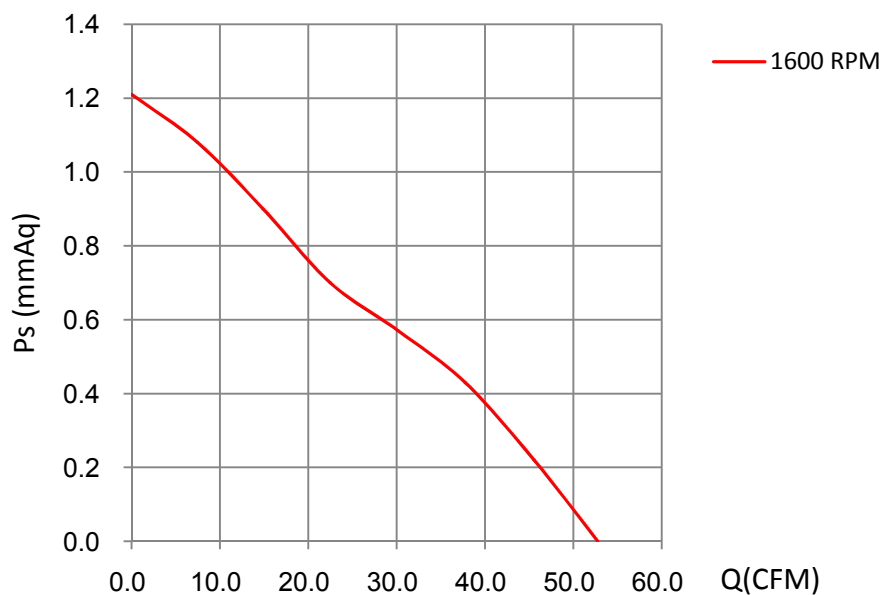

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m³/min	(mmH2O)	inch-H2O	
CD12025H12X	12	7~13.8	0.22	2.64	1600	52.78	1.478	1.21	0.049	39.2

Specifications are subject to change without notice

NIKCOOL

www.nikcool.cn

DONGGUAN YIJIN ELECTRONIC CO.,LTD