DC Φ150x35mm - A

General Specifications

Material:.....Frame:Aluminium
Impeller: .....Impeller:PBT Plastic(UL94V0)
Expected Life: .....Ball Bearing 50,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

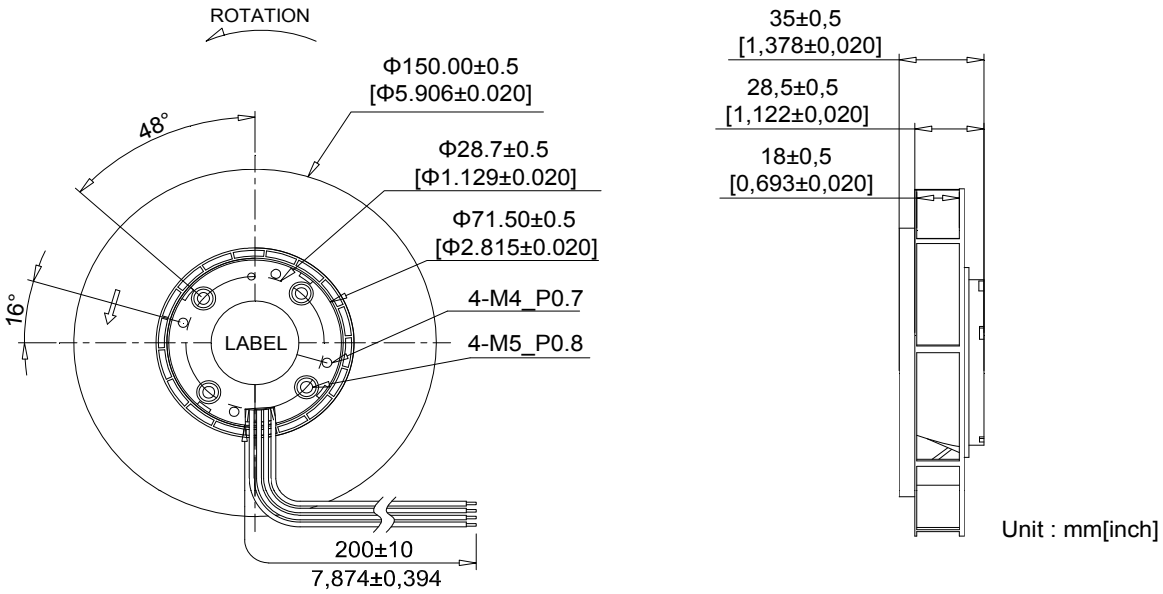

Unit : mm[inch]

Air Flow - Static Pressure Characteristics

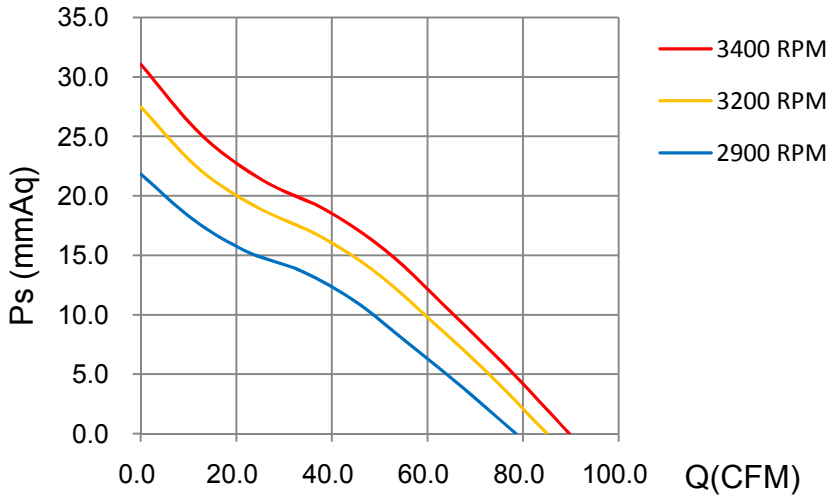

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB15030M12X	12	7~13.8	0.80	9.60	2900	78.52	2.199	21.82	0.880	62.0
CB15030H12X		7~13.8	1.50	18.00	3200	84.99	2.380	27.47	1.108	64.0
CB15030M24X	24	12~25.6	0.60	14.40	2900	78.52	2.199	21.82	0.880	62.0
CB15030H24X		12~25.6	1.00	24.00	3400	89.71	2.512	31.05	1.251	65.5

Specifications are subject to change without notice