DC 60x60x25mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

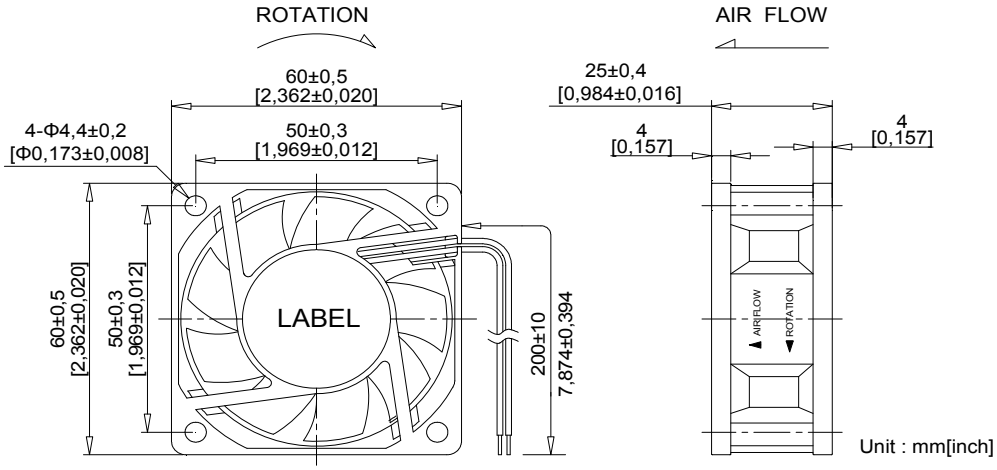

Air Flow - Static Pressure Characteristics

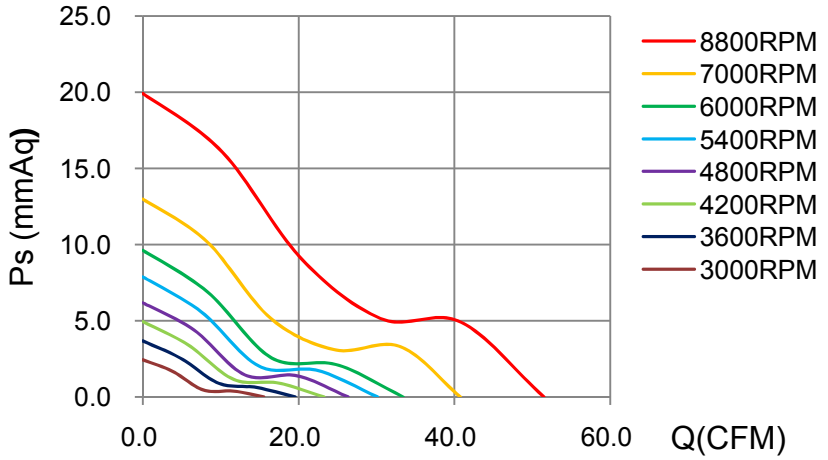

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD6025L05X	5	4~5.5	0.20	1.00	3000	15.53	0.435	2.44	0.096	23.8
CD6025M05X		4~5.5	0.30	1.50	3600	19.56	0.548	3.67	0.144	29.7
CD6025H05X		4~5.5	0.40	2.00	4200	23.28	0.652	4.93	0.194	33.9
CD6025E12X	12	7~13.8	0.15	1.80	3600	19.56	0.548	3.67	0.144	29.7
CD6025L12X		7~13.8	0.27	3.24	4200	23.28	0.652	4.93	0.194	33.9
CD6025M12X		7~13.8	0.35	4.20	4800	26.35	0.738	6.17	0.243	38.6
CD6025H12X		7~13.8	0.44	5.33	7000	40.77	1.142	12.99	0.511	47.0
CD6025X12X		7~13.8	0.80	9.65	8800	51.51	1.442	19.91	0.784	51.9
CD6025L24X	24	12~25.6	0.12	2.88	4800	26.35	0.738	6.17	0.243	38.6
CD6025M24X		12~25.6	0.15	3.60	5400	30.12	0.843	7.88	0.310	40.2
CD6025H24X		12~25.6	0.17	4.08	6000	33.42	0.936	9.63	0.379	42.5
CD6025X24X		12~25.6	0.20	4.80	7000	40.77	1.142	12.99	0.511	47.0

Specifications are subject to change without notice