DC 57x57x12mm - A

General Specifications

Material:……Frame:Plastic(UL94V0)
Impeller: ……Impeller:Plastic(UL94V0)
Expected Life: ……FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

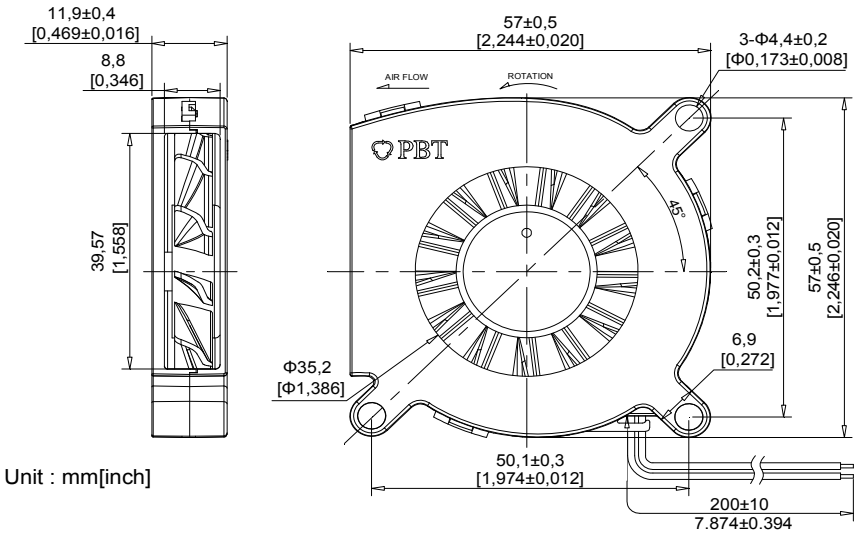

Unit : mm[inch]

Air Flow - Static Pressure Characteristics

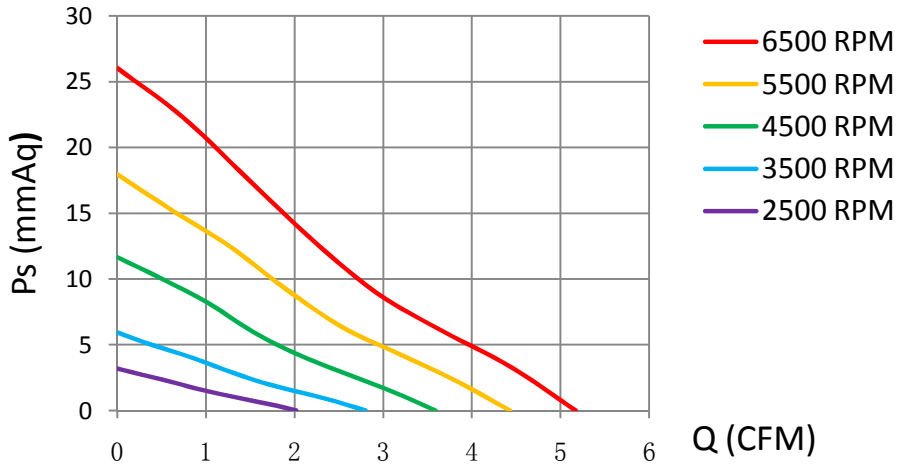

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB5712L05X	5	4~5.5	0.06	0.30	2500	2.02	0.060	3.20	0.126	11.3
CB5712M05X		4~5.5	0.10	0.50	3500	2.83	0.080	6.27	0.247	20.7
CB5712H05X		4~5.5	0.24	1.20	4500	3.59	0.102	11.66	0.459	28.6
CB5712E12X	12	7~13.8	0.05	0.60	2500	2.02	0.060	3.20	0.126	11.3
CB5712L12X		7~13.8	0.08	0.96	3500	2.83	0.080	6.27	0.247	20.7
CB5712M12X		7~13.8	0.12	1.44	4500	3.59	0.1.02	11.66	0.459	28.6
CB5712H12X		7~13.8	0.22	2.64	5500	4.43	0.130	17.97	0.707	36.4
CB5712X12X		7~13.8	0.35	4.20	6500	5.17	0.15	26.05	1.026	43.6

Specifications are subject to change without notice