DC 75x75x30mm - A

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

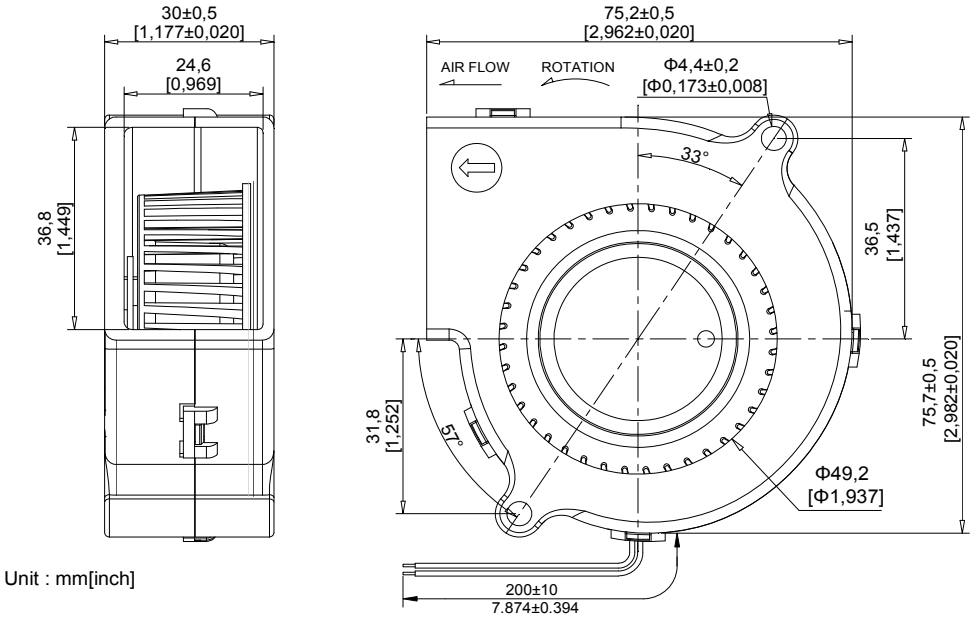

Unit : mm[inch]

Air Flow - Static Pressure Characteristics

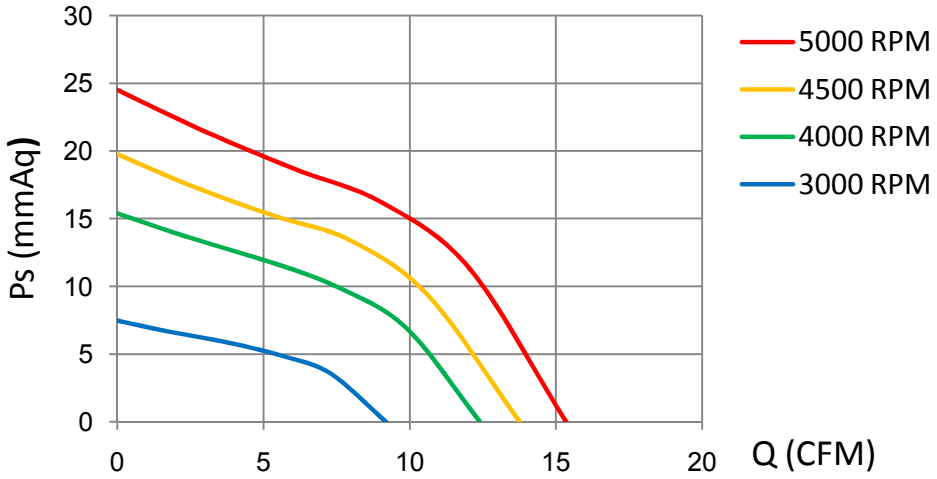

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB7530L12X	12	7~13.8	0.28	3.36	3000	9.19	0.257	7.46	0.304	40.5
CB7530M12X		7~13.8	0.42	5.04	4000	12.40	0.347	15.39	0.628	48.3
CB7530H12X		7~13.8	0.48	5.76	4500	13.76	0.385	19.76	0.806	51.4
CB7530L24X	24	12~25.6	0.18	4.32	4000	12.40	0.347	15.39	0.628	48.3
CB7530M24X		12~25.6	0.25	6.00	4500	13.76	0.385	19.76	0.806	51.4
CB7530H24X		12~25.6	0.29	6.96	5000	15.35	0.430	24.52	0.999	54.1

Specifications are subject to change without notice