DC 120x120x32mm

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

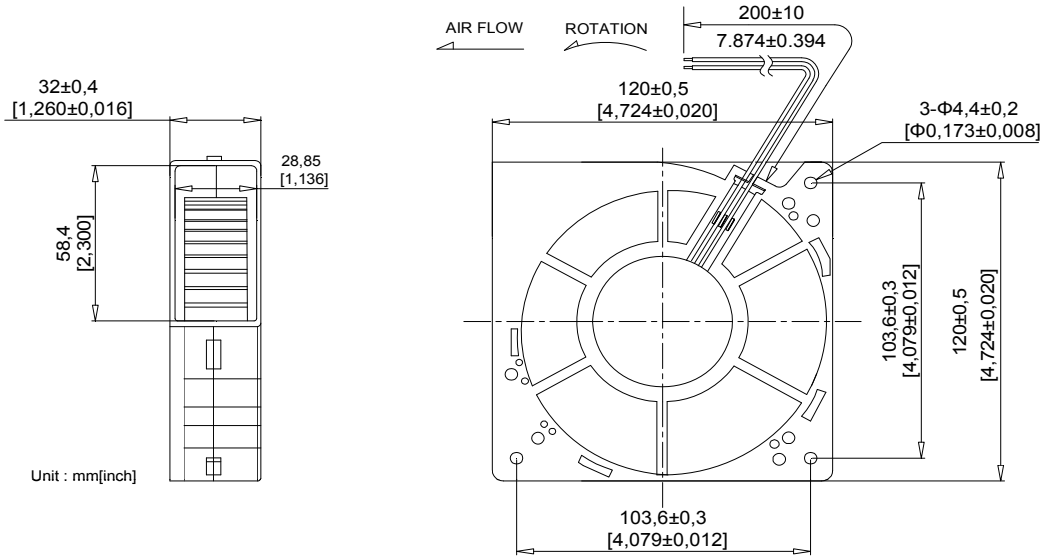

Air Flow - Static Pressure Characteristics

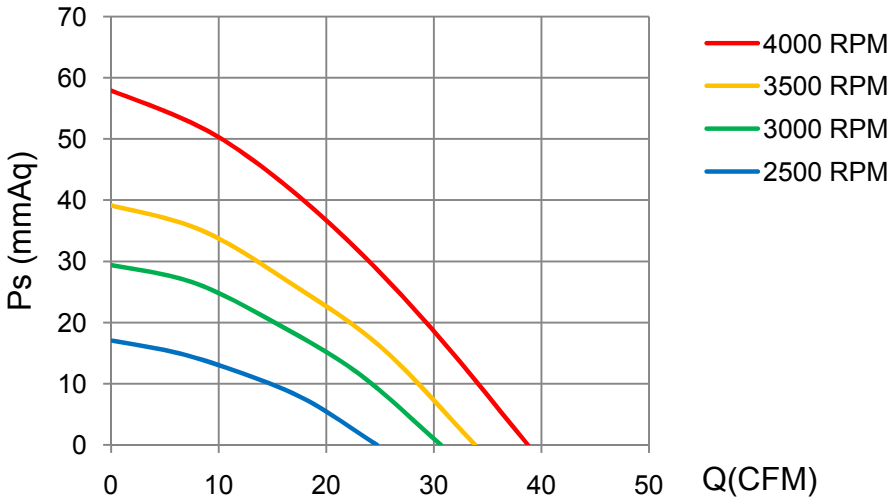

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB12032L12X	12	7~13.8	0.30	3.60	2500	24.69	0.691	17.02	0.672	48.2
CB12032M12X		7~13.8	0.70	8.40	3000	30.64	0.858	29.42	1.161	51.8
CB12032H12X		7~13.8	1.20	14.40	3500	33.82	0.947	39.14	1.546	55.2
CB12032E12X	24	12~25.6	0.30	7.20	2500	24.69	0.691	17.02	0.672	48.2
CB12032L12X		12~25.6	0.50	12.00	3000	30.64	0.858	29.42	1.161	51.8
CB12032M12X		12~25.6	0.90	21.60	3500	33.82	0.947	39.14	1.546	55.2
CB12032H12X		12~25.6	1.30	31.20	4000	38.73	1.084	57.94	2.291	58.0

Specifications are subject to change without notice