DC 148x102x100mm

General Specifications

Material:……Frame:Plastic(UL94V2)
Impeller: ……Impeller:Plastic(UL94V2)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Lead Wire: ……+red -black or yellow Signal,blue Speed control
Temperature Range: ……Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

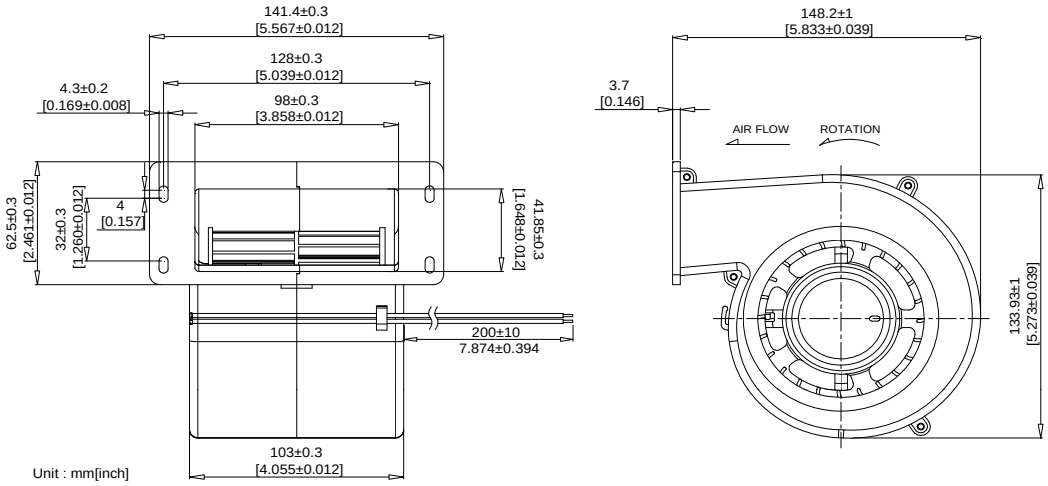

Air Flow - Static Pressure Characteristics

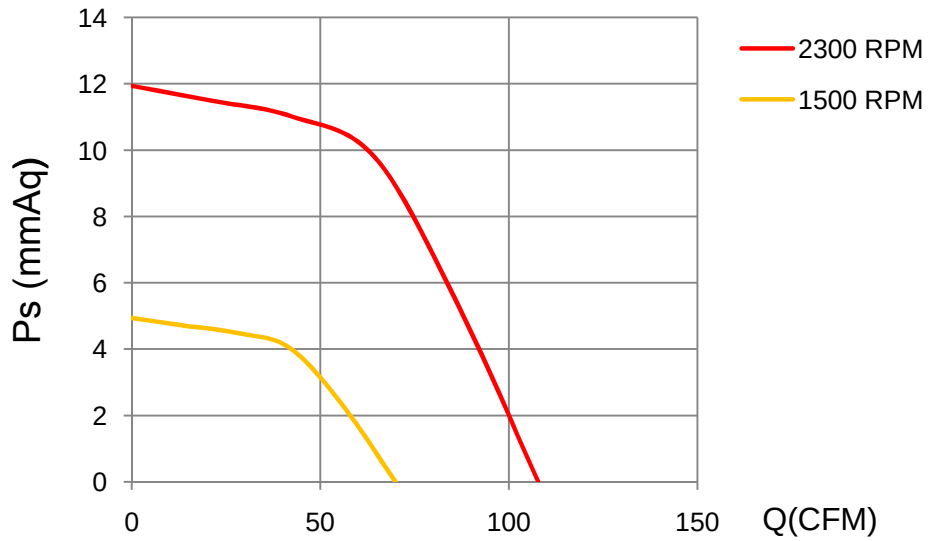

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CB13100L24X	24	12~25.6	0.25	6.00	1500	70.00	1.960	4.94	0.194	40.4
CB13100H24X		12~25.6	0.75	18.00	2300	107.78	3.018	11.94	0.470	52.0

Specifications are subject to change without notice