DC 70x70x25mm - B

General Specifications

Material:.....Frame:Plastic(UL94V0)
Impeller: .....Impeller:Plastic(UL94V0)
Expected Life: .....FDB Bearing 60,000hrs (40℃)
Ball Bearing 50,000hrs (40℃)
Long Life Bearing 25,000hrs (40℃)
Lead Wire: .....+red -black or yellow Signal,blue Speed control
Temperature Range: .....Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: .....FG Signal /RD Signal
Speed control mode: .....PWM Control

Dimensions

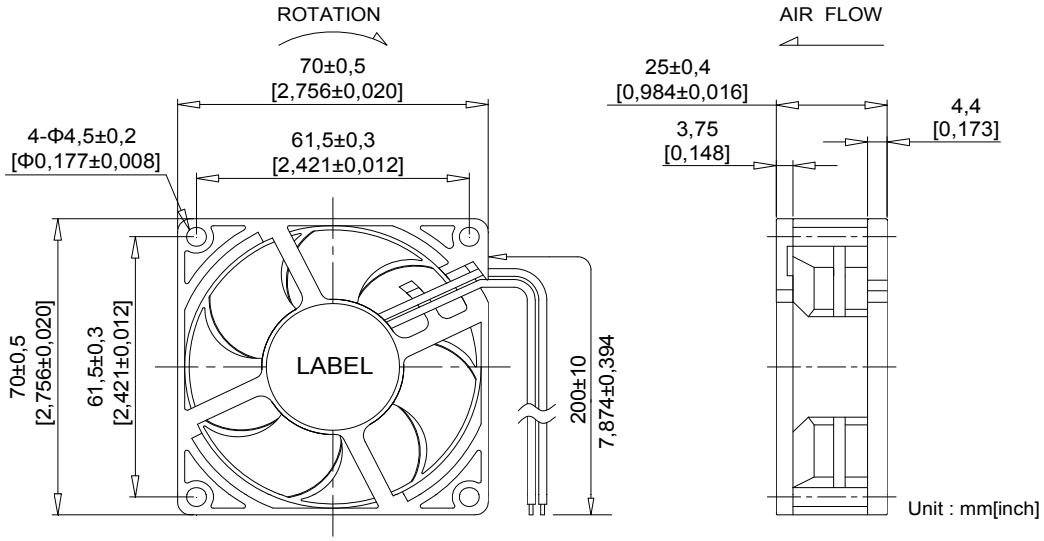

Air Flow - Static Pressure Characteristics

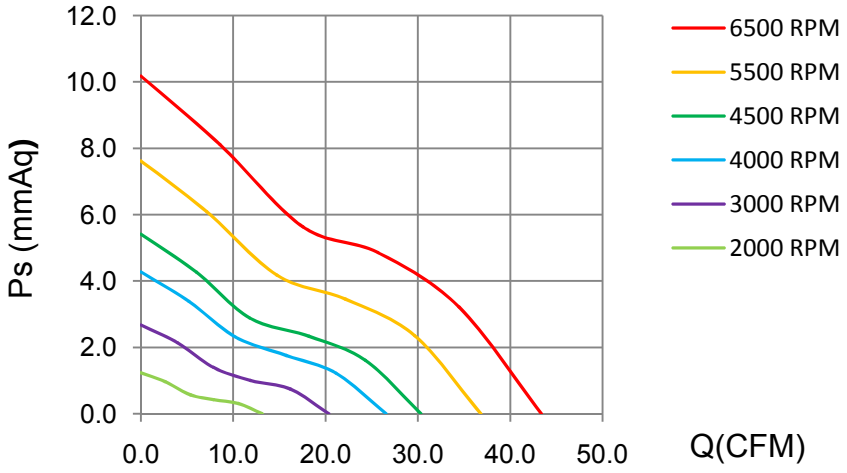

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD7025L05X	5	4~5.5	0.15	0.75	2000	13.14	0.368	1.23	0.050	18.9
CD7025M05X		4~5.5	0.25	1.25	3000	20.35	0.570	2.67	0.109	29.0
CD7025H05X		4~5.5	0.35	1.75	4000	26.57	0.744	4.27	0.174	35.2
CD7025L12X	12	7~13.8	0.18	2.16	4500	30.33	0.849	5.41	0.221	37.8
CD7025M12X		7~13.8	0.28	3.36	5500	36.83	1.031	7.62	0.311	43.9
CD7025H12X		7~13.8	0.38	4.56	6500	43.38	1.215	10.17	0.415	48.5
CD7025L24X	24	12~25.6	0.12	2.88	4500	30.33	0.849	5.41	0.221	37.8
CD7025M24X		12~25.6	0.19	4.56	5500	36.83	1.031	7.62	0.311	43.9
CD7025H24X		12~25.6	0.25	6.00	6500	43.38	1.215	10.17	0.415	48.5

Specifications are subject to change without notice