


DC 172x152x51mm - E

General Specifications


Material:.....Frame:Aluminium
Impeller:Impeller:Plastic(UL94V0)
Expected Life:Ball Bearing 50,000hrs (40℃)
Lead Wire:+red -black or yellow Signal,blue Speed control
Temperature Range:Operating temperature -10℃~70℃(Humidity 35%~85%RH)
.....Storage temperature -30℃~70℃(Humidity 35%~85%RH)
Signal output:FG Signal /RD Signal
Speed control mode:PWM Control



Dimensions

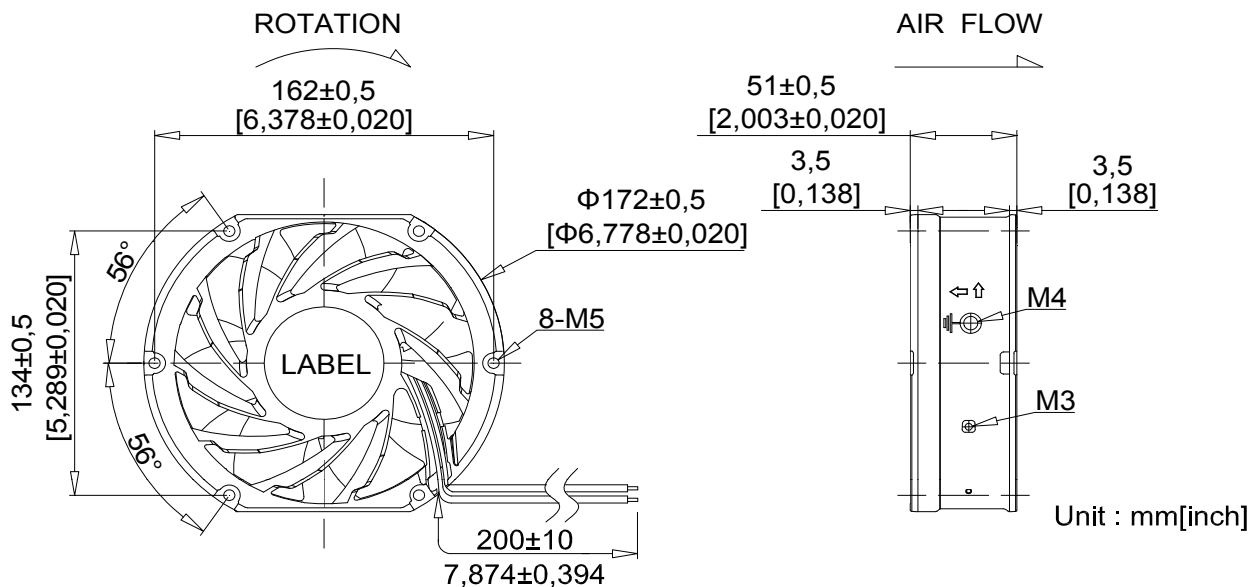

Air Flow - Static Pressure Characteristics

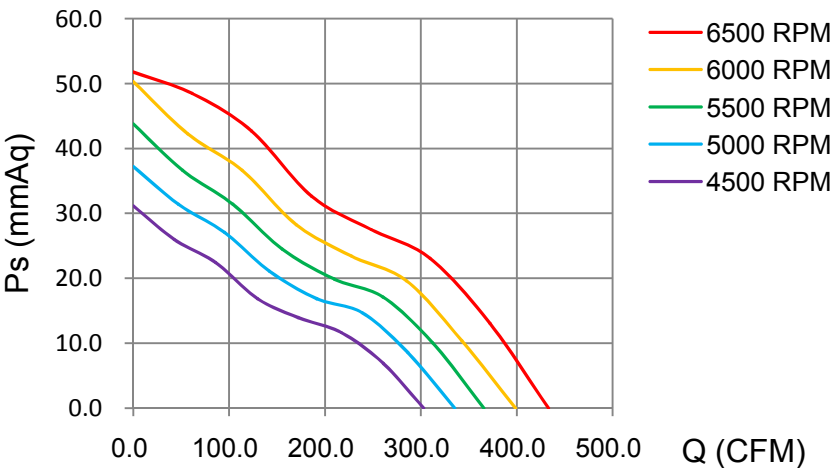

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m ³ /min	(mmH2O)	inch-H2O	
CD17251L24X	24	12~25.6	1.50	36.00	4500	302.84	8.480	31.16	1.227	66.4
CD1725M24X		12~25.6	2.70	64.80	5500	365.70	10.240	43.79	1.724	70.7
CD17251H24X		12~25.6	4.60	110.40	6500	433.25	12.131	51.76	2.038	74.4
CD17251L48X	48	36~54	1.00	48.00	5000	335.16	9.384	37.23	1.466	68.7
CD17251M48X		36~54	1.60	76.80	6000	398.89	11.169	50.31	1.981	72.6
CD17251X48X		36~54	2.20	105.60	6500	433.25	12.131	51.76	2.038	74.4

Specifications are subject to change without notice