DC 200x200x53mm - A

General Specifications

Material:……Frame:Aluminium
Impeller: ……..Impeller:Plastic(UL94V0)
Expected Life: ……Ball Bearing 50,000hrs (40℃)
Lead Wire: ……..+red -black or yellow Signal,blue Speed control
Temperature Range: ……..Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
Storagetemperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: ……..FG Signal /RD Signal
Speed control mode: ……PWM Control

Dimensions

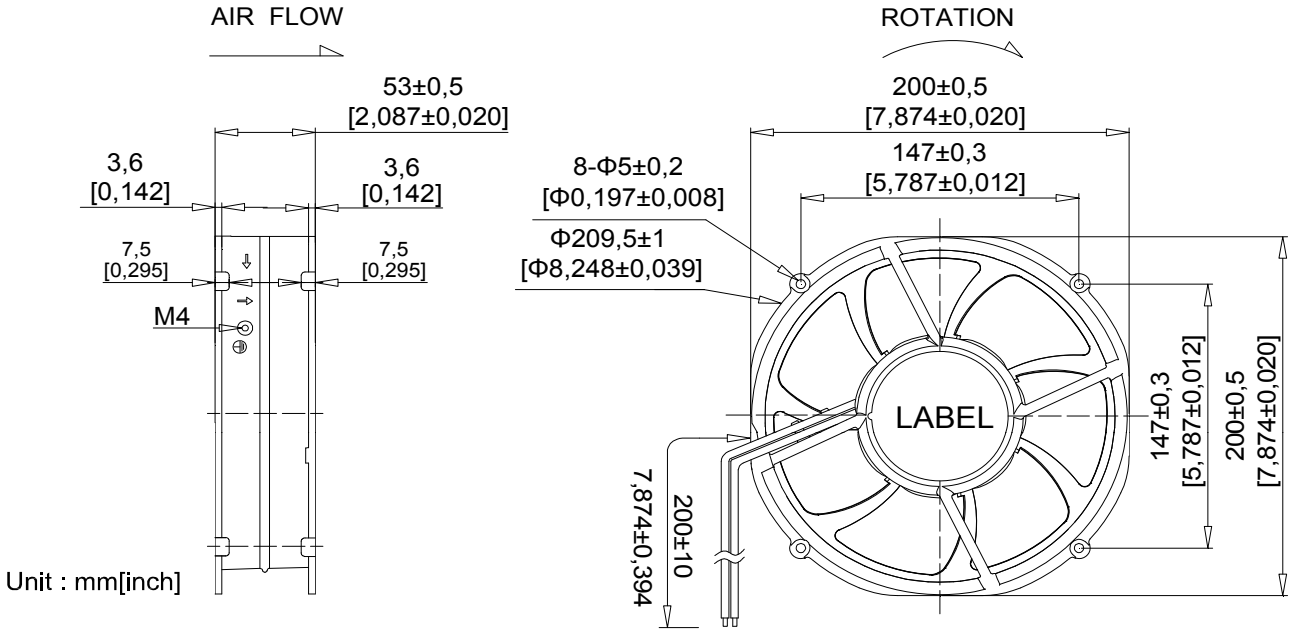

Air Flow - Static Pressure Characteristics

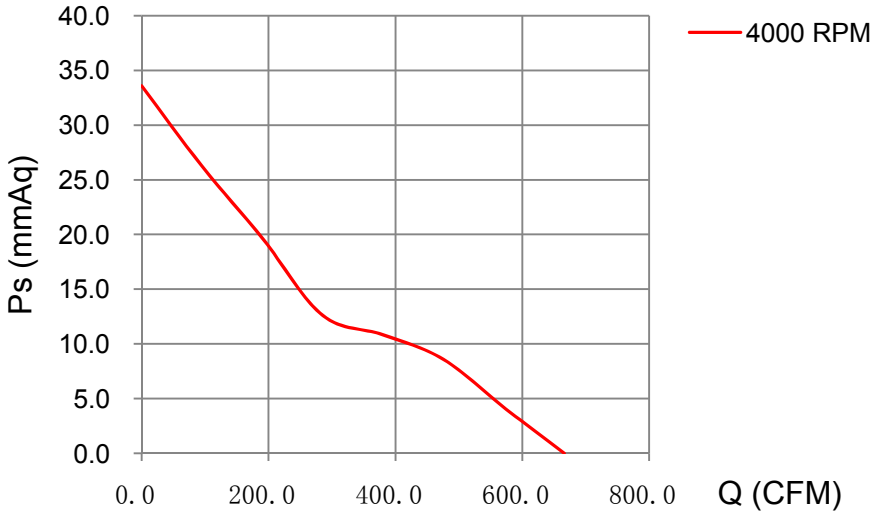

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m^3/min	(mmH2O)	inch-H2O	
CD20053H48X	48	36~54	2.30	110.40	4000	666.31	18.657	33.59	1.322	70.0

Specifications are subject to change without notice

NIKCOOL
www.nikcool.cn
DONGGUAN YIJIN ELECTRONIC CO.,LTD