


DC 150x150x50mm - A

General Specifications


Material:.....Frame:Aluminum
Impeller: Impeller:Plastic(UL94V0)
Expected Life: Ball Bearing 50,000hrs (40℃)
Lead Wire:+red -black or yellow Signal,blue Speed control
Temperature Range: Operating temperature -10℃～70℃(Humiditumidity 35%~85%RH)
.....Storage temperature -30℃～70℃(Humiditumidity 35%~85%RH)
Signal output: FG Signal /RD Signal
Speed control mode: PWM Control



Dimensions

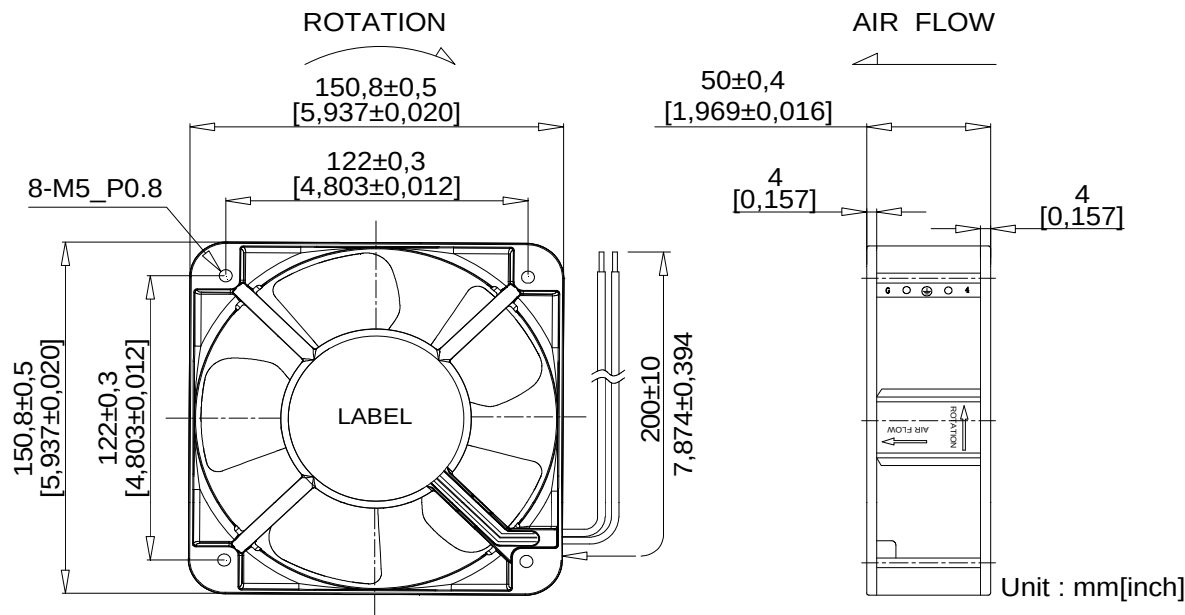

Air Flow - Static Pressure Characteristics

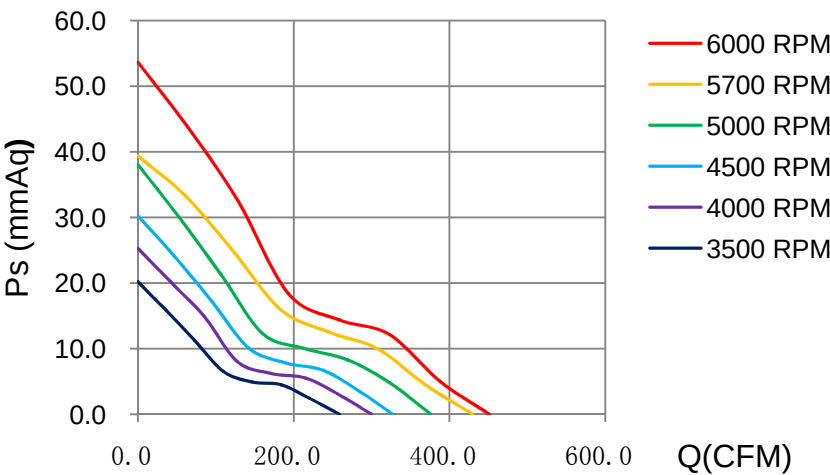

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m ³ /min	(mmH2O)	inch-H2O	
CD15050L24X	24	12~25.6	1.20	28.80	3500	259.03	7.25	20.18	0.794	59.5
CD15050M24X		12~25.6	2.00	48.00	4500	327.01	9.16	30.26	1.191	65.7
CD15050H24X		12~25.6	3.60	86.40	5700	429.98	12.04	39.38	1.550	72.1
CD15050L48X	48	36~54	0.90	43.20	4000	300.04	8.40	25.29	0.996	62.9
CD15050M48X		36~54	1.60	76.80	5000	375.82	10.52	38.08	1.499	67.9
CD15050H48X		36~54	2.40	115.20	6000	451.05	12.63	53.70	2.178	73.6

Specifications are subject to change without notice



www.nikcool.cn

DONGGUAN YIJIN ELECTRONIC CO.,LTD