


DC 205x205x72mm - A

General Specifications


Material:.....Frame:Aluminium
Impeller: Impeller:Plastic(UL94V0)
Expected Life: Ball Bearing 50,000hrs (40°C)
Lead Wire:+red -black or yellow Signal,blue Speed control
Temperature Range: Operating temperature -10°C~70°C (Humidity 35%~85%RH)
.....Storage temperature -30°C~70°C (Humidity 35%~85%RH)
Signal output: FG Signal /RD Signal
Speed control mode: PWM Control



Dimensions

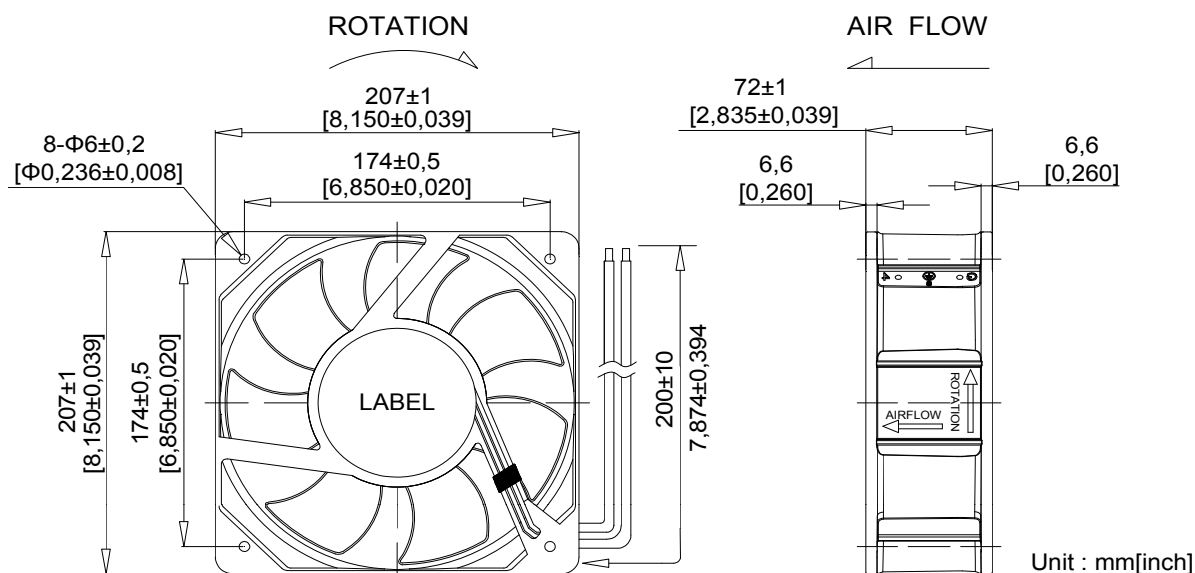

Air Flow - Static Pressure Characteristics

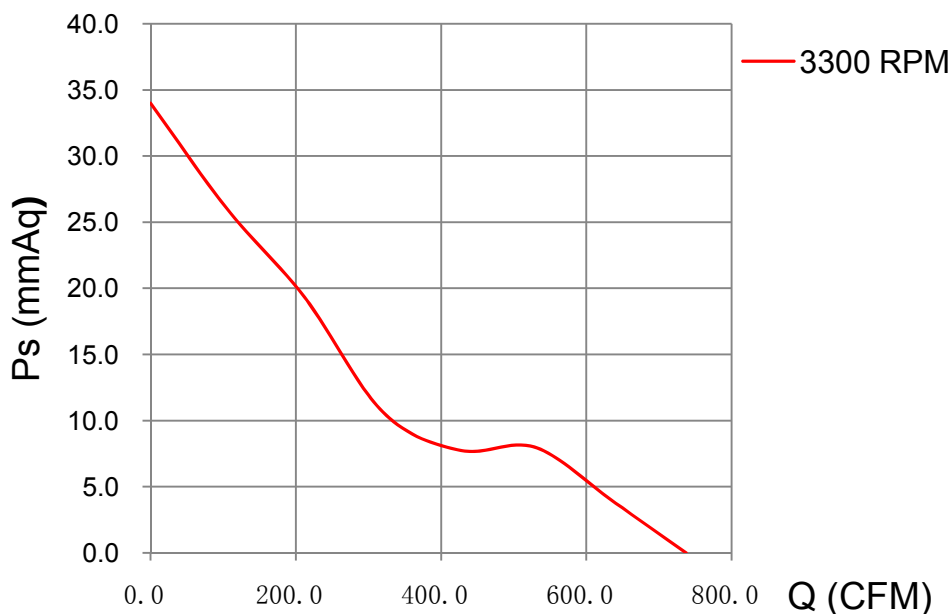

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure		Sound level dB(A)
						(CFM)	m ³ /min	(mmH2O)	inch-H2O	
CD20572H24X	24	12~25.6	6.80	163.20	3300	737.42	20.6478	33.99	1.338	71.3
CD20572H48X	48	36~54	3.20	153.60	3300	737.42	20.6478	33.99	1.338	71.3

Specifications are subject to change without notice

NIKCOOL

www.nikcool.cn

DONGGUAN YIJIN ELECTRONIC CO.,LTD